


Thermocouples

Mineral Insulated Style AT With Thermowells

Straight Well

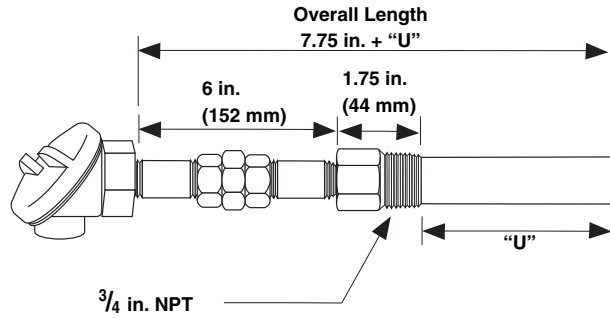


Rapid Ship Sensors

Rapid Ship sensors come with 316 SS straight well, nipple-union-nipple, 0.250 inch diameter spring loaded element, small aluminum connection head and ungrounded junction.

Calibration	"U"		Overall Length		Part Number
	in.	(mm)	in.	(mm)	
J	2.5	(64)	10.25	261	ATJE1SF024UJ0Y0
	4.5	(114)	12.25	312	ATJE1SF044UJ0Y0
	7.5	(191)	15.25	388	ATJE1SF074UJ0Y0
	10.5	(267)	18.25	465	ATJE1SF104UJ0Y0
K	2.5	(64)	10.25	261	ATJE1SF024UK0Y0
	4.5	(114)	12.25	312	ATJE1SF044UK0Y0
	7.5	(191)	15.25	388	ATJE1SF074UK0Y0
	10.5	(267)	18.25	465	ATJE1SF104UK0Y0

Tapered Well

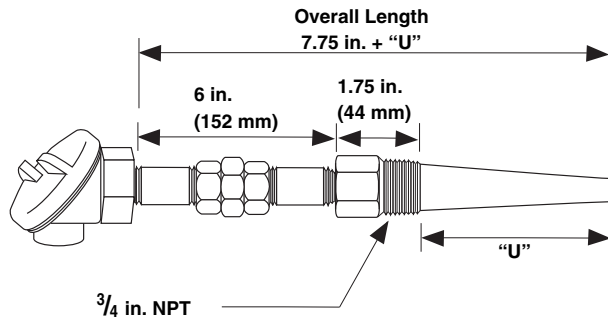

Rapid Ship Sensors

Rapid Ship sensors come with 316 SS tapered well, nipple-union-nipple, 0.250 inch diameter spring loaded element, small aluminum connection head and ungrounded junction.

Calibration	"U"		Overall Length		Part Number
	in.	(mm)	in.	(mm)	
J	2.5	(64)	10.25	261	ATJE1TF024UJ0Y0
	4.5	(114)	12.25	312	ATJE1TF044UJ0Y0
	7.5	(191)	15.25	388	ATJE1TF074UJ0Y0
	10.5	(267)	18.25	465	ATJE1TF104UJ0Y0
K	2.5	(64)	10.25	261	ATJE1TF024UK0Y0
	4.5	(114)	12.25	312	ATJE1TF044UK0Y0
	7.5	(191)	15.25	388	ATJE1TF074UK0Y0
	10.5	(267)	18.25	465	ATJE1TF104UK0Y0