

Quick Ship

- Same day shipment on more than 1000 variations of THINBAND heaters.

Band Heaters

THINBAND® Mica Barrel and Nozzle

The THINBAND® heater is Watlow's patented redesign of the mica band. THINBAND heaters deliver fast and install easily, keeping costs down and machines running.

Performance Capabilities

- Sheath temperatures to 480°C (900°F)
- Watt densities to 55 W/in² (8.5 W/cm²)



Features and Benefits

Flexible, one-piece design

- Makes installation easier on plastic processing equipment because it can open to full diameter of the barrel without internal damage to the heater
- Installs on a barrel without removing other band heaters already in place

Same day shipment on more than 1,000 variations available because of Watlow's Lead Adapter (LA) manufacturing method


- Reduces inventories and costly downtimes

Only one set of leads or terminals

- Cumbersome, two-piece replacement band heaters with straps require two sets

Quick clamp

- Opens to fit over barrels and snaps in place with one easy flip of its latching lever
- No need to remove other heaters

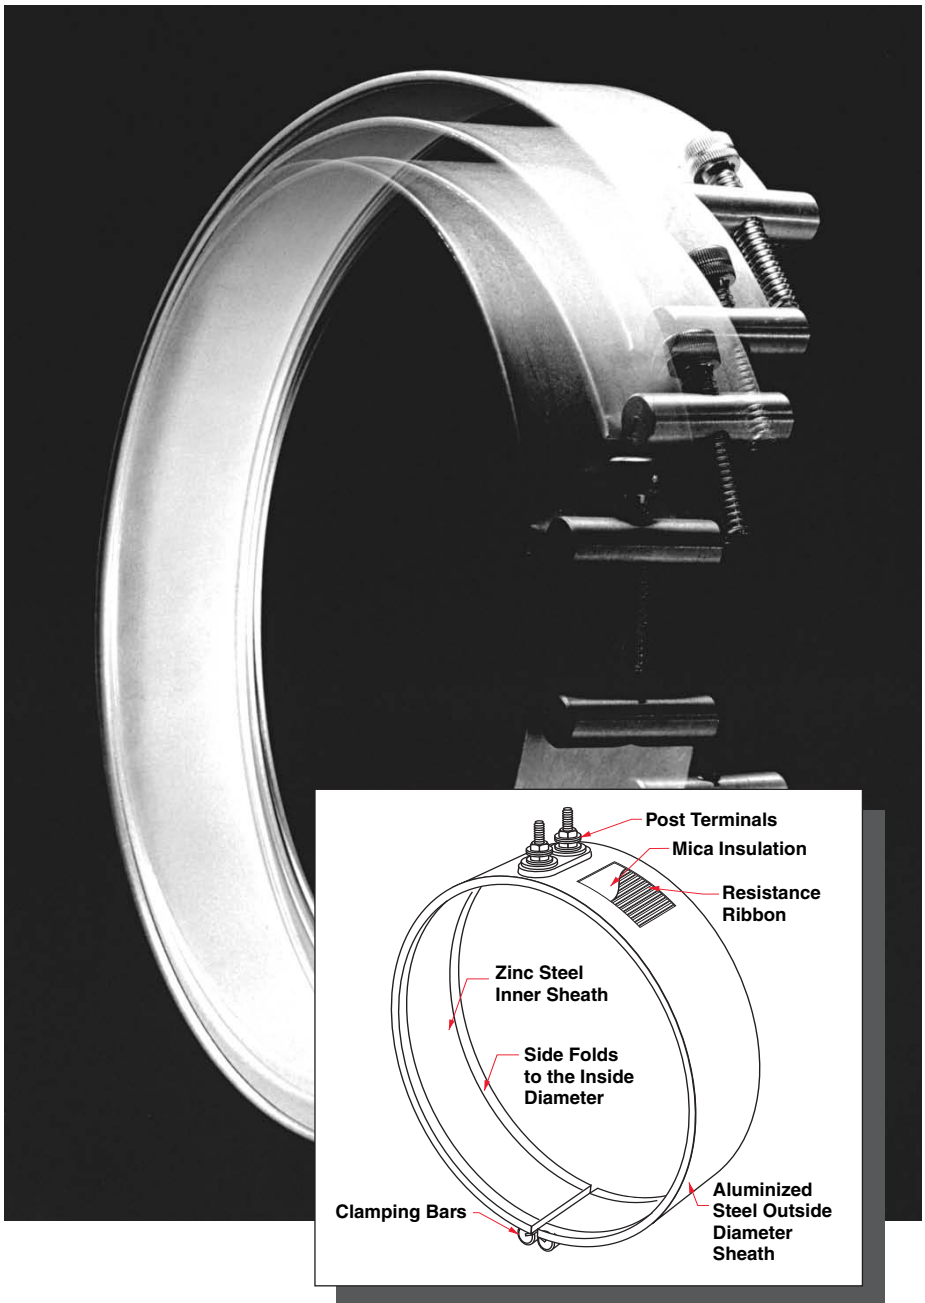

Permanently attached clamping bars

No folds on the outside of the heater

- Contamination resistance

Applications

- Extruders
- Blown film dies
- Injection molding machines
- Other cylinder heating applications

Band Heaters

THINBAND Mica Barrel and Nozzle

Applications and Technical Data

Operating Factors

Use as low a watt density rating as your application permits. A close match of the heat supplied to the actual requirements will reduce temperature overshoot, reduce cycling and increase the life of any band heater you use.

Calculate the **safe maximum wattage** for your heater using:

Heated Area x Maximum Watt Density


Calculate the **heated area** of your band heater by subtracting the no-heat area from the total area in contact with the cylinder ($3.14 \times \text{I.D.} \times \text{width}$). Subtract the no-heat area at the terminals (from table) and any additional no-heat area caused by holes, slots or oversize gaps.

Determine the maximum watt density of your heater from the *Maximum Allowable Watt Density* graph. The curves are based on narrow heaters mounted on a smooth, steel cylinder. Apply the necessary correction factors:

- For heaters 2¼ inches (57 mm) to five inches wide (127 mm), multiply watt density by 0.8.
- For high expansion cylinders (aluminum or brass), reduce the watt density by 3 W/in² (0.46 W/cm²).
- For heaters 2¼ inches to five inches (57 mm to 127 mm) wide installed on a high expansion cylinder, reduce watt density by a total of 3 W/in² (0.46 W/cm²) only.
- For regular cylinder surfaces other than smooth, machined finish, reduce watt density by 3 W/in² (0.46 W/cm²).
- For heaters that will be insulated or enclosed, contact Watlow for specific watt densities.
- For units greater than 14 inches (355 mm) diameter, consult the *THINBAND Recommended Clamping Options* graph.
- For units used in vertical applications, consult factory for application assistance.

No-Heat Area for THINBAND Barrel (All Terminations)

Heater Type	Heater Size		No-Heat Area Standard Gap ¾ in. in. (mm)
	Diameter in. (mm)	Width in. (mm)	
One Piece	Less than 2½ (63.5)	Up to 7 (177.8)	1¼ (31.75) x width
Two Piece	5 (127) or more	More than 3 (76.2)	2½ (63.5) x width

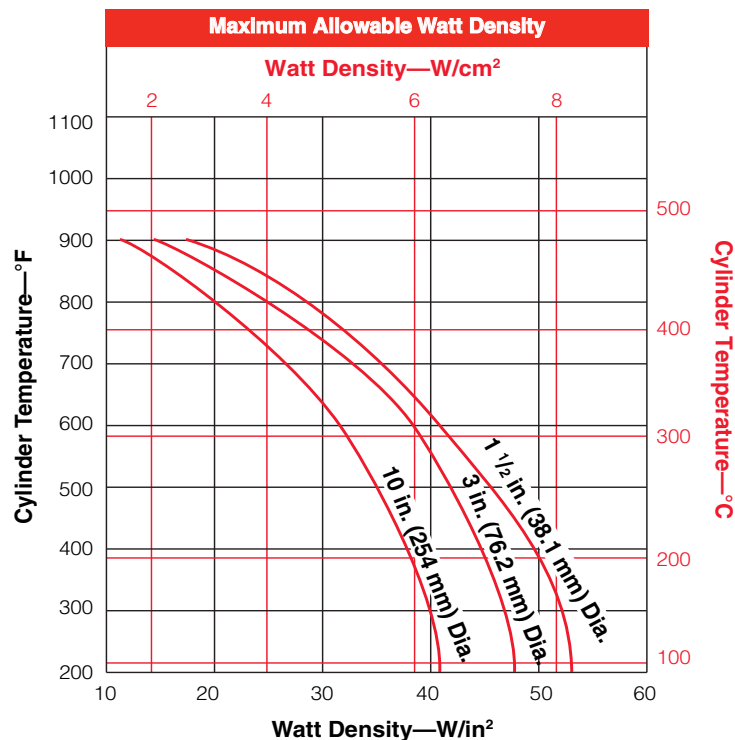


Band Heaters

THINBAND Mica Barrel and Nozzle

Physical Limitations of Lead Variations

Check the table to be certain the variations and lead arrangements you order are available on the heater size you require. If you need to exceed any limitations, please contact a Watlow representative.

THINBAND Barrel

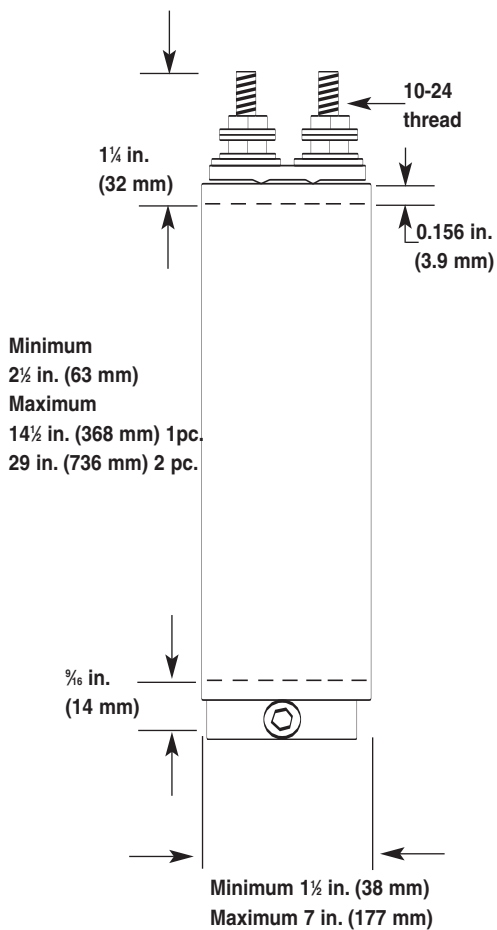

Physical Limitations of Lead Variations

Heater Type	Diameter		Width	
	Min. in. (mm)	Max. in. (mm)	Min. in. (mm)	Max. in. (mm)
1 pc. const.	1 (25.4)	14 1/2 (368.3)	1 1/2 (38.1)	7 (177.8)
2 pc. const.	5 (127)	29 (736.6)	1 1/2 (38.1)	7 (177.8)
<i>Nozzle</i>				
Type A	1 (25.4)	4 (101.6)	1 (25.4)	6 (152.4)
Type L	1 (25.4)	4 (101.6)	1 (25.4)	6 (152.4)
<i>Barrel</i>				
Type T	2 1/2 (63.5)		1 1/2 (38.1)	7 (177.8)
Type H	2 1/2 (63.5)		1 1/2 (38.1)	7 (177.8)
Type F, FR	2 1/2 (63.5)		1 1/2 (38.1)	7 (177.8)
Type E	2 1/2 (63.5)		1 1/2 (38.1)	7 (177.8)
Type C, BR	2 1/2 (63.5)		1 1/2 (38.1)	7 (177.8)
Type K, KR	2 1/2 (63.5)		1 1/2 (38.1)	7 (177.8)
Terminal Box	3 1/2 (88.9)		1 1/2 (38.1)	7 (177.8)
<i>European Plug</i>				
1 pc. vertical	2 1/2 (63.5)	14 1/2 (368.3)	1 1/2 (38.1)	7 (177.8)
1 pc. horizontal	2 1/2 (63.5)	14 1/2 (368.3)	1 1/2 (38.1)	7 (177.8)
<i>Welded Barrel Nuts</i>				
1 pc.	2 1/2 (63.5)	14 1/2 (368.3)	1 1/2 (38.1)	7 (177.8)

Note: Some combinations of maximums and minimums cannot occur on the same heater. Check the table to be certain the variations and lead arrangements you order are available on the heater size you require. If you need to exceed any limitations, please contact your Watlow representative.
Standard gap is 3/8 inch (9.53 mm) between clamp bars.

Band Heaters

THINBAND Mica Barrel and Nozzle

Barrel Heater

QUICK CLAMP Option

With QUICK CLAMP, the THINBAND heater can be secured tightly in place in a matter of seconds. The spring-loaded clamp secures the heater tightly around the barrel with an easy flip of the lever.

QUICK CLAMP eliminates tools, loose parts and hassle

- THINBAND opens up to fit over barrel. There is no need to remove other heaters.
- One easy flip of the latching lever and QUICK CLAMP shuts, completing installation.




Features and Benefits

- THINBAND with QUICK CLAMP fits over barrels and snaps in place with easy flip of its latching lever.
- Hot change-outs are completed in seconds.
- Spring tensioned clamp keeps the THINBAND heater tight against barrel—will not loosen over time.
- Ideal for vertical applications.
- Available on selected stock and made-to-order THINBAND barrel heaters—minimum 4 inch (100 mm) diameter, 1½ inch (38 mm) width.
- Standard gap is ½ inch.

Clearance Dimensions

Width Range in. (mm)	Number of QUICK CLAMPS	Distance Between Clamps in. (mm)
1½ (38.1) to 2¼ (69.3)	1	NA
2¾ (69.9) to 3¼ (94.8)	2	½ (12.7)
3¾ (69.9) to 4¼ (120.1)	2	1 (25.4)
4¾ (120.6) to 5¼ (145.5)	3	½ (12.7)
5¾ (146.1) to 7 (145.5)	3	1 (25.4)

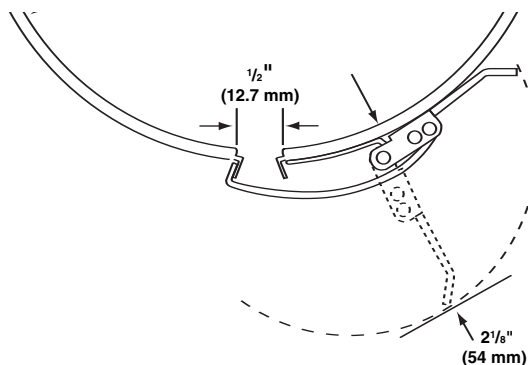


Recommended Clamping Options

THINBAND Barrel Products

- Clamp Bars**
- Clamp Bars**
Or QUICK CLAMP
above 4 in. (101.6 mm) diameter
- QUICK CLAMP**
For 2 piece:
Clamp bar at other gap
- Coil Spring**
For 2 piece only:
Clamp bar at other gap


Notes: Widths four inches (101.6 mm) and over add two inches (50.8 mm) to diameter then reference chart clamp selection.

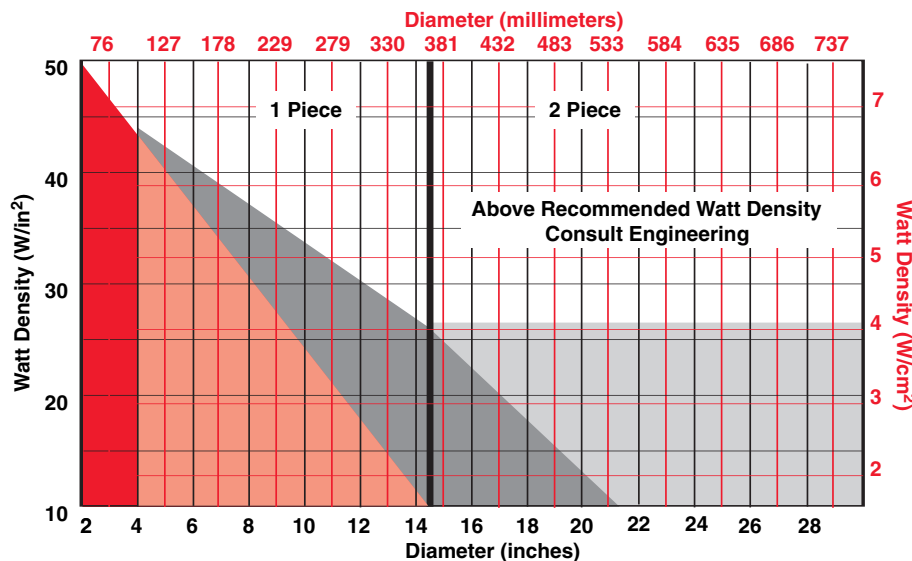

Band Heaters

THINBAND Mica Barrel and Nozzle


Barrel Heater Clamping Variations

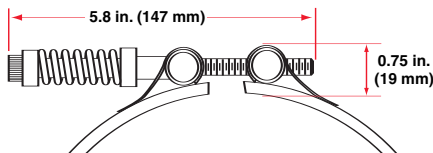

Tig Welded Barrel Nuts with Spring Loaded Clamping

Tig welded barrel nuts with spring loaded clamping are used during start-up to maintain a tight heater fit on large barrels. Stainless steel top metal is required.

Refer to the *THINBAND Recommended Clamping Options* graph. This option is mandatory on vertical applications. To order, specify **spring loaded clamping**.

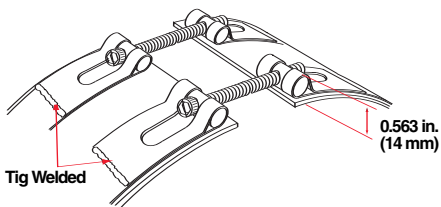


Tig Welded Barrel Nuts

An ideal way to provide access for instrumentation is to specify an oversized gap between the heater ends. If the THINBAND clamp bar screw interferes with the positioning of the instrumentation device,

tig welded barrel nuts are recommended. Stainless steel top metal is required. Maximum gap is one inch (25 mm). Specify **tig welded barrel nuts** and **gap dimension** when ordering.

Non-Stock Option




Clamping Pads

Clamping pads are used when an obstruction would prevent a standard full circumferential heater from fitting completely around a machine barrel. The clamping pads

have a hole to allow easy fastening to the machine barrel. **Dimensional drawing required or customer supplied sample heater** when ordering.

Variations

Non-Stock Option



Holes

An economical way to provide access for instrumentation is to specify an oversized gap between the heater ends. A hole in the sheath should be specified only when all the cylinder surface adjacent to the hole must be heated. **When required, one hole may be provided in nearly any location as long as**

there is at least one inch (25 mm) between the hole and one side of the heater. Standard hole sizes up to two inches (51 mm) diameter. Consult factory for limitations. For proper hole location, a **dimensional drawing or custom supplied sample heater** is required.


Band Heaters

THINBAND Mica Barrel and Nozzle Barrel Heater Variations

Continued

Non-Stock Option

Stock LA Option

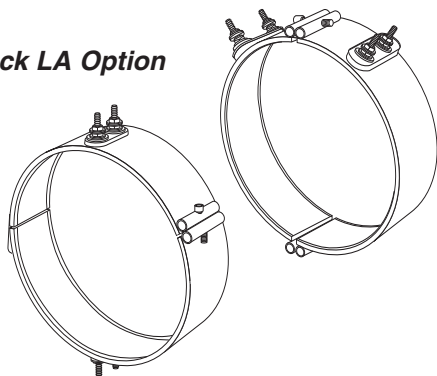

Two-Piece Band Heaters


Two-piece construction is available on heaters five inches (127 mm) or greater in diameter. Heaters 1½ inches (38 mm) wide and greater with post terminals have the two terminals side-by-side.

Note: When ordering two-piece band heaters, specify the **volts** and **watts per half**. On two-piece units with leads, you must also specify the **power supply voltage**. Example: a two-piece band that is 240V~(ac)

per half may be wired in series to a 480V~(ac) power supply. In this case the band heater lead wire insulation must be rated for 480V~(ac). Available from stock by combining two one-piece heaters to create a large diameter. Terminations will be 90 degrees from each gap. **QUICK CLAMP** must be supplied at one gap when ordering.

Stock Option

Stock Option

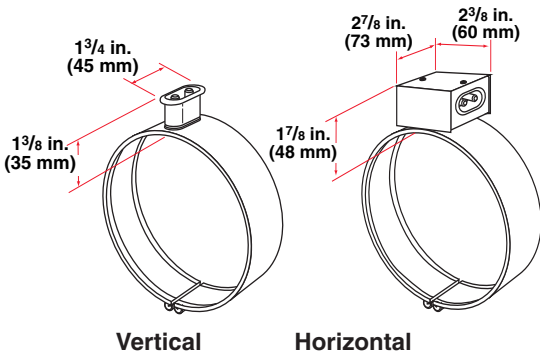


High Temperature “Quick Disconnect” European Style Plugs

They provide the simplest and safest way to apply power to band heaters. The combination of high temperature male and female quick disconnect plug assemblies eliminates all live exposed terminals

and electrical wiring that can be a potential hazard to employees or machine. Maximum 15 amps at 240V~(ac), maximum 240 volts. When ordering, specify **vertical** or **horizontal European** plug.

Stock Option



Stock Option



High Temperature “Quick Disconnect” European Style Female Adapters

Available as an accessory item that must be used in conjunction with high temperature “quick disconnect” European style plugs.

Specify code number **N6027AF049** or **N6027ZZ028** and quantity.


Band Heaters

THINBAND Mica Barrel and Nozzle


Barrel Heater Variations

Continued

Stock Option



Stock Option

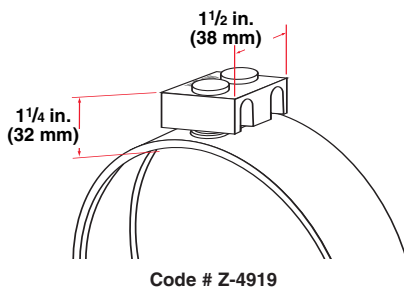

Metallic Terminal Box

Available on heaters of 3½ inches (88 mm) diameter or larger. Terminal boxes are attached to the heater to cover the terminals for an added safety feature. Conduit may be attached to the box through

¾ inch (22 mm) diameter holes in the ends of the box. Terminal box is available on one or two-piece stock THINBAND heaters. When ordering, specify **terminal box**.

Ceramic Terminal Covers

A convenient and economic way to insulate post terminals. Sized for standard length posts. 10-24 screw thread size. These are supplied as

an accessory item and shipped separately. Specify code number **Z-4919** and quantity.


Metric Clamp Bars and Screws

Metric hardware is available on made-to-order THINBAND heaters with post terminals and clamp bars. The post terminal thread size

is M5X.8. The screw for the clamp bar will be M6X1.0 socket head cap screw. When ordering, specify **metric hardware** required.

Terminations

Stock LA Option



Type T

Post terminals provide a quick connection with ring or fork connectors, or buss strips. Threaded 10-24 studs or optional metric (M5X.8) are provided with double nuts and washers. Post terminals have a threaded length of ⅝ inch (14 mm) and require 1¼ inches (32 mm) clearance from the cylinder. Maximum amperage for post terminals is 35 amps and they can withstand up to 45 in-lbs (61.0 Newton-Meter) of torque. The increased torque is possible

due to the unique add-on lead cap design, which makes the cap a separate entity from the heater. This means all of the torque carrying capability is maintained within the cap design, allowing the terminal hardware to be torqued to a specific setting and tested prior to connection to the heater.

The welded electrical connection to the heater is superior to crimped or staked connections which can loosen and oxidize during operation. To order, specify **Type T**.

Band Heaters


THINBAND Mica Barrel and Nozzle

Barrel Heater Terminations

Continued


Heaters rated at less than 250 volts use UL® approved lead insulation for operations to 250°C (482°F) as standard. Lead insulation UL® rated for operation to 450°C (850°F) may be required in high temperature applications where the leads are shrouded or enclosed with the heater. All heaters rated at more than 250V~(ac) use this wire.

Type K
Stock LA Option




Flexible lead wires exit vertically from the heater. These leads can be bent adjacent to the heater for a quick and easy connection. To order, specify **Type K** and length.

Type KR
Stock LA Option




Same specifications as Type K except lead wires exit at right angle. To order, specify **Type KR** and length.

Type C
Stock LA Option




Two fiberglass lead wires exit a single tightly woven metal braid for good abrasion protection, lead flexibility and wiring convenience. Leads are two inches (51 mm) longer than the braid. To order, specify **Type C** and length.

Type BR
Stock LA Option




Same specifications as Type C except lead wires exit at right angle. To order, specify **Type BR** and length.

Type F
Stock LA Option



Loose fiberglass sleeving encloses two fiberglass leads for additional insulation protection where high temperature or minor abrasion is present. Leads are two inches (51 mm) longer than the sleeving. To order, specify **Type F** and length.

Type FR
Stock LA Option




Same specifications as Type F except lead wires exit at right angle. To order, specify **Type FR** and length.

Band Heaters

THINBAND Mica Barrel and Nozzle Barrel Heater Terminations


Continued

Type E Stock LA Option



Loose metal braid encloses two fiberglass leads for good abrasion protection, lead flexibility and wiring convenience. Leads are two inches (51 mm) longer than the braid. To order, specify **Type E** and length.

Type H Stock LA Option



A stainless steel, flexible conduit encloses the leads for superior mechanical protection where lead abrasion is a particular problem. Leads are two inches (51 mm) longer than the conduit. To order, specify **Type H** and length.


Ground Wire or Terminal Stud

Uninsulated 18 gauge ground wire is available on all lead types except post terminals and Type C leads. A 10-24 ground terminal

stud has a threaded length of $1\frac{1}{16}$ inch (17 mm). To order, specify **uninsulated ground wire** or **terminal stud**.


THINBAND Nozzle Heater Terminations

- One to four inch diameter
- One to six inches wide

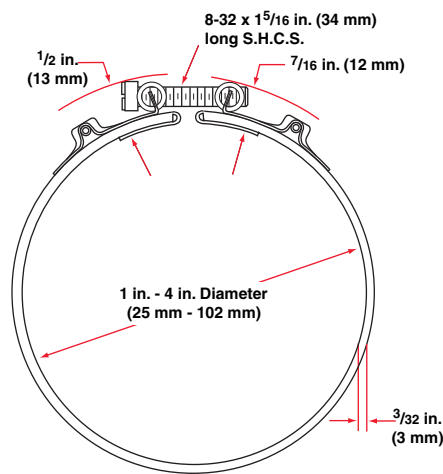


Type L Stock Option

Flexible lead wires with fiberglass sleeves exit the nozzle heater on both sides of the gap. The heater sheath encloses the ends for protection against contamination. To order, specify **Type L**.

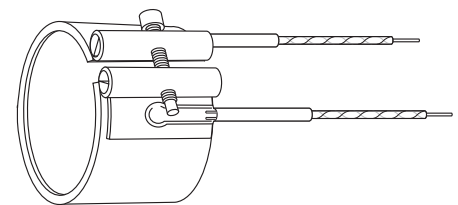

Type A Stock Option

Especially designed for nozzle heaters, there is a galvanized metal braid over the fiberglass insulated leads, which provides strength and protection. The heater ends are enclosed to protect against melted plastic and contaminants. This arrangement permits one inch (25 mm) and wider nozzle heaters to be placed flush against a flange. Available on nozzle sizes only. To order, specify **Type A**.

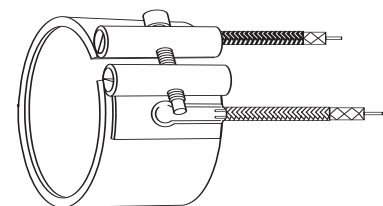

Band Heaters

THINBAND Mica Barrel and Nozzle

How to Utilize Watlow's Universal THINBAND Barrel Stock Program

Various diameters and widths of Watlow's unique patented flexible THINBAND barrel heaters are available with LA termination's for shipment faster than any in the market because of Watlow's unique stocking program.

Watlow stocks THINBAND barrel heaters ranging in diameters from three to nine inches (76.2 to 228.6 mm) in $\frac{1}{4}$ inch (6.35 mm) increments and widths in $1\frac{1}{2}$ inch (38.1 mm), two inch and three inch (50.8 and 76.2 mm). Watlow can combine these sizes, creating a two-piece assembly ranging from nine to 18 inches (228.6 to 457.2 mm) in diameter, and any combination between three and 18 inches (76.2 and 457.2 mm) as a two-piece assembly. This versatility should satisfy almost any requirements whether millimeter or inch size barrels.

Regarding possible slight wattage differences from your original heater to your THINBAND replacement you must keep in mind that about 80 percent of the wattage is required to bring the barrel up to temperature. The 20 percent remaining is used to offset radiation and convection heat losses. So, if you have a 550 watt heater there is no harm in using a 500 or 600 watt stock THINBAND barrel heater.

There are three approaches to receive a THINBAND combination from stock. To illustrate, let's examine a customer who needs a 10 inch (254 mm) diameter heater but neither the size or width needed is in stock.

Solutions:

- #1) Take two five-inch (127 mm) diameter heaters and curve to a 10 inch (254 mm) diameter. Please note that a QUICK CLAMP has to be added to the order for the heater to fit. This heater is offered next day delivery.
- #2) Take two THINBAND heaters as noted in #1 but mix each diameter. For example, one four-inch (101.6 mm) and one six-inch (152.4 mm) diameter or a $4\frac{3}{4}$ (120.6 mm) diameter with a $5\frac{1}{4}$ (133.3 mm) diameter equal 10 inches (254 mm). Again you need a QUICK CLAMP. This heater is also offered next day delivery.
- #3) Take two THINBANDs as in #1 or #2 but subtract a $\frac{1}{4}$ inch (6.35 mm) to the diameter and supply without the QUICK CLAMP for same day delivery. For example for a 10 inch (254 mm) diameter, any combination of $9\frac{3}{4}$ inch (248 mm) should be supplied to fit the 10 inch (254 mm) diameter requirement. The reason you have to reduce your selection size by a $\frac{1}{4}$ inch (6.35 mm) is to ensure a gap when tightening the clamp bars otherwise you will run out of gap and the bars will touch before you can tighten the heater completely to the barrel. This is only necessary when QUICK CLAMP is not included.

Installation Procedures

1. Install heaters over a clean surface.
2. After installing the unit, begin to tighten the clamp screw. The clamping screw is $\frac{1}{4}$ inch-20 x $1\frac{1}{4}$ inch, allen head cap screw. Begin tightening the clamp bars. If the clamp bars appear not to have seated, tap the clamp bars with a small hammer to insure the bars are well seated in the angle formed by the 60 degree bent tab and the heater.
3. If the bar has multiple screws, alternately tighten the screws as you would the lug nuts on a car wheel to insure even loading.
4. Torque all screws to approximately 8 ft.-lbs.
5. Take a soft rubber mallet and tap gently around the circumference of the heater while tightening the screws. This will ensure the heater fit to the barrel is maximized without any air gaps.
6. When installing terminal lugs, torque the top nuts to 30 in.-lbs. The bottom nut should not be touched as it is factory torqued to 45 in.-lbs. at assembly.
7. Retighten the heater after the heater has operated for a short time. Always make adjustments when the heater and cylinder are cold.

Band Heaters

OEM Band Heater Stock List

Cincinnati Milacron

Cincinnati Milacron Code No.	Watlow Code No.	I.D. in.	Width in.	Volts	Watts	Termination
326330	ME5A1JP10	5	1 ½	240/480	580	Post
326331	ME6J1JP6	6 ½	1 ½	240/480	1000	Post
326332	ME7J1JP5	7 ½	1 ½	240/480	900	Post
326333	ME8A1JP8	8	1 ½	240/480	1000	Post
326335	ME10A1JP1	10	1 ½	240/480	1200	Post
326336	ME11A1JP2	11	1 ½	240/480	1480	Post
326338 ^①	ME8A1JP9	8	1 ½	240/480	800	Post
326340	ME9A1JP9	9	1 ½	240/480	1100	Post
326341	ME9J1JP6	9 ½	1 ½	240/480	1000	Post
326342	ME13A1JP4	13	1 ½	240/480	1400	Post
326344	ME14J1JP2	14 ½	1 ½	240/480	1480	Post
326346	ME5A1JP11	5	1 ½	240/480	770	Post
326347	ME7A1JP6	7	1 ½	240/480	1000	Post
3901993 ^①	B1J4AX2	1 ½	4	120	500	51 in. dual SS braided leads
3953682	ME5J1JP6	5 ½	1 ½	240/480	600	Post
3961105	ME12A1JP1	12	1 ½	240/480	1480	Post
3994402	B5R5EX1	5 ⅞	5 ¼	240/480	2350	Post
3994523	B7J7EX2	7 ½	7 ¼	240/480	5000	Post
5021019	B9H2AX1	9 ⅞	2	240/480	1700	Post
5021021	B8B4AX1	8 ⅞	4	240/480	2100	Post
5021022 ^①	B8B9EX1	8 ⅞	9 ¼	240/480	4900	Post
5021232	B11P2AX1	11 ⅞	2	240/480	2200	Post
5021233	B11P3JX1	11 ⅞	3 ½	240/480	3900	Post
5021234	B8H3JX1	8 ⅞	3 ½	240/480	2800	Post
5021428 ^①	B4S2GX2	4 ⅞	2 ¾	240/480	1200	Post
5022010	B6J5JX2	6 ½	5 ½	240/480	3000	Post
5022015	B5J4JX1	5 ½	4 ½	240/480	1700	Post
5024377	B10H2AX1	10 ⅞	2	240/480	2000	Post
5024378	B10H3JX1	10 ⅞	3 ½	240/480	3300	Post
5024379	B8H5JX1	8 ⅞	5 ½	240/480	3800	Post
5025500	B5J4JX2	5 ½	4 ½	240/480	2500	Post
5027465 ^①	B13A2JX6	13	2 ½	240/480	3000	Post
5027466	B13A4NX1	13	4 ¾	240/480	5000	Post
5033192	ME13A2JP1	13	2 ½	240/480	3000	Post
5033194	ME9H4AP1	9 ⅞	4	240/480	4000	Post
5034485	ME9H3AP2	9 ⅞	3	240/480	2400	Post
5034486	ME9H2AP2	9 ⅞	2	240/480	1600	Post
5034487	ME8B3AP1	8 ⅞	3	240/480	2000	Post
5035117	ME8B4AP1	8 ⅞	4	240/480	2650	Post
5035761	ME11A4AP1	11	4	230/460	3500	Post

CONTINUED

^① Available in limited quantities. Contact the factory for delivery information.

Band Heaters

OEM Band Heater Stock List

Cincinnati Milacron

Cincinnati Milacron Code No.	Watlow Code No.	I.D. in.	Width in.	Volts	Watts	Termination
5038858	ME5R5AP3	5 $\frac{7}{8}$	5	240/480	2350	Post
5039028	ME8H5AP1	8 $\frac{7}{16}$	5	240/480	3250	Post
5039197	ME6J5AP1	6 $\frac{1}{2}$	5	240/480	3000	Post
5039239	ME7J3AP2	7 $\frac{1}{2}$	3	240/480	2325	Post
5039247 ^①	ME9H3AP3	9 $\frac{7}{16}$	3	240/480	2300	Post

HPM/New Britain

HPM/ New Britain Code No.	Watlow Code No.	I.D. in.	Width in.	Volts	Watts	Termination
146-503	B2E0RA1C	2 $\frac{1}{4}$	$\frac{7}{8}$	120	215	60 in. dual SS braided leads
155-1187	B4S2AH1A	4 $\frac{15}{16}$	2	240/480	800	18 in. flexible hose and leads
155-1188	B4S3AH2B	4 $\frac{15}{16}$	3	240/480	1200	20 in. flexible hose and leads
155-730	B4R5AH1A	4 $\frac{7}{8}$	5	240/480	1520	36 in. flexible hose and leads
155-731	B4R10AH1B	4 $\frac{7}{8}$	10	240/480	2250	44 in. flexible hose and leads
155-732	B4R4SH1A	4 $\frac{7}{8}$	4 $\frac{15}{16}$	240/480	1100	48 in. flexible hose and leads
220-1532	B6N2EH1A	6 $\frac{3}{4}$	2 $\frac{1}{4}$	240/480	1200	48 in. flexible hose and leads
300-1512	B8E3AH1A	8 $\frac{1}{4}$	3	240/480	1950	49 in. flexible hose and leads
300-1513	B8E5NH5A	8 $\frac{1}{4}$	5 $\frac{3}{4}$	240/480	3750	49 in. flexible hose and leads
300-1514	B5E2AH2A	5 $\frac{1}{4}$	2	240/480	850	49 in. flexible hose and leads
375-0042	B6N4NH1A	6 $\frac{3}{4}$	4 $\frac{3}{4}$	240/480	2500	48 in. flexible hose and leads
C2-008-490A	B4S4AH1B	4 $\frac{15}{16}$	4	240/480	1500	48 in. flexible hose and leads
C2-008-491A	B4S3AH2	4 $\frac{15}{16}$	3	240/480	1200	48 in. flexible hose and leads
C63-3142	B4E2NH1B	4 $\frac{1}{4}$	2 $\frac{3}{4}$	240/480	950	43 in. flexible hose and leads
EA2005730	B1A1NA1A	1	1 $\frac{3}{4}$	120	230	60 in. dual SS braided leads
EA2201532	B6N2EH1A	6 $\frac{3}{4}$	2 $\frac{1}{4}$	240/480	1200	48 in. flexible hose and leads
EA2201600	B3N1JH1A	3 $\frac{3}{4}$	1 $\frac{1}{2}$	480	400	48 in. flexible hose and leads
EA3001512	B8E3AH1A	8 $\frac{1}{4}$	3	240/480	1950	49 in. flexible hose and leads
EA3001513	B8E5NH5A	8 $\frac{1}{4}$	5 $\frac{3}{4}$	240/480	3750	49 in. flexible hose and leads
EA3001514	B5E2AH2A	5 $\frac{1}{4}$	2	240/480	850	49 in. flexible hose and leads
EA3750042	B6N4NH1A	6 $\frac{3}{4}$	4 $\frac{3}{4}$	240/480	2500	48 in. flexible hose and leads
EC1460403	B2E0RA1C	2 $\frac{1}{4}$	$\frac{7}{8}$	120	215	60 in. dual SS braided leads
EC1463096	B4E2NH2A	4 $\frac{1}{4}$	2 $\frac{3}{4}$	240/480	950	36 in. flexible hose and leads
EC1550732	B4R4SH1A	4 $\frac{7}{8}$	4 $\frac{15}{16}$	240/480	1100	48 in. flexible hose and leads
EC2008490	B4S4AH1H	4 $\frac{15}{16}$	4	240/480	1500	82 in. leads/72 in. flexible hose
EC2008491A ^①	B4S3AH2G	4 $\frac{15}{16}$	3	240/480	1200	82 in. leads/72 in. flexible hose

^① Available in limited quantities. Contact the factory for delivery information.

Band Heaters

OEM Band Heater Stock List

Mitsubishi

Mitsubishi Code No.	Watlow Code No.	I.D. in.	Width in.	Volts	Watts	Termination
US207060T	STB5J5A8-T	5 ½	5	240	1900	Post
US207060W	STB6A5J3-T	6	5 ½	240	2400	Post
US207099C	STB2C1A7-XX7	2 ½	1	220	250	74 in. dual SS braided leads
US207101M	STB5A5J1-T	5	5 ½	240	2000	Post
US207159R	STB5A2G1-T	5	2 ¾	240	950	Post

Natco

Natco Code No.	Watlow Code No.	I.D. in.	Width in.	Volts	Watts	Termination
CR12202-1	B7B3JP1	7 ⅙	3 ½	240/480	1200	Post
CR12202-2	B7B3JP2	7 ⅙	3 ½	240/480	1650	Post
CR12202-5	B6F3AP1	6 ⅝	3	240/480	1250	Post
CR12202-10	B12J4AP1	12 ½	4	240/480	3000	Post
CR12202-11	B12J3JP2	12 ½	3 ½	240/480	3000	Post
CR12202-13	B9L3AP2	9 ⅝	3	240/480	2000	Post
CR12202-16	B8E4AP1	8 ¼	4	240/480	3000	Post
CR12202-18	B10E4AP1	10 ¼	4	240/480	3000	Post

Nissei

Nissei Code No.	Watlow Code No.	I.D. in.	Width in.	Volts	Watts	Termination
8H1601107-51	B06F04FE-268	6 ⅝	4 ⅝	230/460	1800	60 in. single SS braided leads
8H0300451-04	B01D01NB-276	1 ⅜	1 ¾	220	170	36 in. single SS braided leads
8H0500501-02	B01S01SE-275	1 ⅝	1 ⅝	220	320	84 in. single SS braided leads
8H1000701-51	B03S02NE-273	3 ⅝	2 ¾	220	720	96 in. single SS braided leads
8H1061807-51	B04C07BE-271	4 ½	7 ⅙	230/460	2000	36 in. single SS braided leads
8H1200687-53	B04N02ME-270	4 ¾	2 ⅝	230/460	900	48 in. single SS braided leads

Band Heaters

OEM Band Heater Stock List

Reed

Reed Code No.	Watlow Code No.	I.D. in.	Width in.	Volts	Watts	Termination
RC-159088-C	B1N2AG2	1 3/4	2	240	300	144 in. fiberglass leads
RC-159088-D	B1N2AG1	1 3/4	2	480	300	144 in. fiberglass leads
RC-159089-L	B7J3AG2	7 1/2	3	480	1400	144 in. fiberglass leads
RD-128613	B6A3AR1	6	3	230/460	1400	Post
RD-129890	B4R2AR1	4 3/4	2	240/480	760	Post
RD-132322	B7A3AR1	7	3	230/460	1650	Post
RD-158900-B	B5A3AX1	5	3	240/480	1200	Post
RD-159337-B	B6J2JX1	6 1/2	2 1/2	240/480	1200	Post
ZE-600475-FD	B4N3AX1	4 3/4	3	240/480	1100	Post
ZE-600600-FF	B6A3AX9	6	3	240/480	1400	Post
ZE-600700-FG	B7A3AX1C	7	3	240/480	1650	Post
ZE-600800-FJ	B8A3AX6	8	3	240/480	1900	Post
ZE-600875-FK ^①	B8N3AX6	8 3/4	3	240/480	2000	Post

^① Available in limited quantities. Contact the factory for delivery information.

Toshiba

Toshiba Code No.	Watlow Code No.	I.D. in.	Width in.	Volts	Watts	Termination
316M3602	B04F04PX-291	4 5/16	4 13/16	240/480	1830	Post
333M0003	B06F04JR-289	6 5/16	4 1/2	480	2430	Post
333M0005	B12D03GR-287	12 3/16	3 3/8	240/480	3500	Post
333M0008	B06J03CR-286	6 1/2	3 3/8	480	1740	Post
333M0012 ^①	B06R04CR-284	6 7/8	4 1/8	240/480	2420	Post
333M3903	B06F04JR-289	6 5/16	4 1/2	480	2430	Post
333M3905	B12D03GR-287	12 3/16	3 3/8	240/480	3500	Post
333M3908	B06J03CR-286	6 1/2	3 3/8	480	1740	Post
333M3912	B06R04CR-284	6 7/8	4 1/8	240/480	2420	Post
333M4001	B08H02GP-283	8 7/16	2 3/8	480	1700	Post
333M4002 ^①	B08M02KP-282	8 11/16	2 5/16	240/480	1900	Post
333M4105 ^①	B04C02NC-279	4 1/8	2 3/4	220	160	20 in. single SS braided leads
3382G6015	B2D1GC1	2 3/16	1 3/8	240	300	67 in. single SS braided leads
3383G017	B3J3SP1	3 1/2	3 5/16	240	1180	Post
3383G057	B4F4AP1	4 5/16	4	240	1500	Post
3383G058	B4F3CP1	4 5/16	3 3/8	240	1160	Post
3383G0812	B4M5NP1	4 11/16	5 3/4	240	2300	Post
3383G1207 ^①	B6F5MP1	6 3/16	5 11/16	240	3000	Post
3383G129	B6F6EP1	6 3/16	6 1/4	240	3380	Post
347L50	B3K3GP3	3 3/16	3 3/8	240	955	Post

CONTINUED

^① Available in limited quantities. Contact the factory for delivery information.

Band Heaters

OEM Band Heater Stock List

Toshiba (Con't)

Toshiba Code No.	Watlow Code No.	I.D. in.	Width in.	Volts	Watts	Termination
348L7102	B1J1NC1	1 ½	1 ¾	240	320	39 in. single SS braided leads
348L7103	B3C1GC1	3 ¾	1 ¾	240	530	39 in. single SS braided leads
382G5107 [Ⓢ]	B1D1DC1	1 ⅝	1 ⅝	240	170	78 in. single SS braided leads
382G5603 [Ⓢ]	B1S1AC2	1 ⅝	1	240	200	48 in. single SS braided leads
382G6008 [Ⓢ]	B2C1AC5	2 ½	1	240	215	67 in. single SS braided leads
382G6009	B2C1AC5B	2 ½	1	240	215	55 in. single SS braided leads
382G6102	B2F1NC1	2 ⅝	1 ¾	240	500	86 in. single SS braided leads
382G6904	B2G1GC1	2 ¾	1 ¾	240	240	19 in. single SS braided leads
383G0101	B3J3FP1	3 ½	3 ⅝	240	910	Post
383G0502	B4F3JP1	4 ⅝	3 ½	240	1210	Post
383G0802	STB4M4L1-T	4 1/16	4 5/8	240	1760	Post
383G1101	B6F2GR1	6 ⅝	2 ¾	480	1100	Post
383G1102 [Ⓢ]	B6F2GR2	6 ⅝	2 ¾	240	1100	Post
383G1105	B6F3JR1	6 ⅝	3 ½	240	1600	Post
383G1203	B6F6AP1	6 ⅝	6	240	3000	Post
383G1211	B6F7FP1	6 ⅝	7 ⅝	240	3900	Post
383G4505	B6J4FR1	6 ½	4 ⅝	240	2400	Post
383G4510 [Ⓢ]	B11A8BR1	11	8 ⅝	240/240	6700	Post
383G4512	B10A6RR1	10	6 ⅞	240/480	5500	Post
383G4515	B8E5MR2	8 ¼	5 1/16	240	4720	Post
383G452	B6R3KR1	6 ⅞	3 ⅝	240/240	2100	Post
383G4601	B8H2GP1	8 ⅞	2 ¾	240	1700	Post
383G4601	B08H02GP-283	8 ⅞	2 ¾	480	1700	Post
383G4602	B8M2KP1	8 1/16	2 ⅝	480	1900	Post
383G4602	B08M02KP-282	8 1/16	2 ⅝	240/480	1900	Post
383G4603	B10E2SP2	10 ¼	2 1/16	240	2600	Post
383G4604	B12D3FP1	12 ⅝	3 ⅝	240	3500	Post
383G4605	B14D4FP1	14 ⅝	4 ⅝	240/240	5200	Post
383G4606	B12P3SP2	12 1/16	3 19/16	240	4300	Post
383G4701	STB4F1K1-CX2	4 ⅝	1 ⅝	240	401	20 in. single SS braided leads
39742592	B9A2JX2	9	2 ½	240/480	1785	Post, dual voltage
44H21132W	B1G0NA1	1 ¾	¾	240	85	40 in. dual SS braided leads
97680614	B3J2NP1	3 ½	2 ¾	240	940	Post
9768371W [Ⓢ]	B5R6AP1	5 ⅝	6	240	2810	Post
98821109	B2A1AA10	2	1	240	180	47 in. dual SS braided leads
9882114W	B2D1AA2	2 ⅝	1	240	200	78 in. dual SS braided leads

[Ⓢ] Available in limited quantities. Contact the factory for delivery information.

Band Heaters

THINBAND Mica Barrel and Nozzle

Stock Product List

I.D. in. (mm)	Width in. (mm)	Volts	Watts	Watt Density W/in ² (W/cm ²)	1 pc. or 2 pc.	Terminals, Leads and Special Features	Approx. Net. Wt. lbs (kg)	Avail.	Code No.	Former Code No.
1 (25.4)	1 (25.4)	120	100	44 (6.8)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1A1A1	B1A1AN1
	1 (25.4)	240	100	44 (6.8)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1A1A2	B1A1AN2
	1 (25.4)	120	125	55 ① (8.5)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1A1A3	B1A1AN3
	1 (25.4)	240	125	55 ① (8.5)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1A1A4	B1A1AN4
	1½ (38.1)	240	150	44 (6.8)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1A1J2	B1A1JN2
	1½ (38.1)	120	200	59 ① (9.1)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1A1J3	B1A1JN3
	1½ (38.1)	240	200	59 ① (9.1)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1A1J4	B1A1JN4
1¼ (31.8)	¾ (15.9)	120	100	54 ① (8.4)	1	Mica Band–12 in. Type A	0.2 0.09	Stock	B1EOLA1	–
	1¼ (31.8)	120	125	33 (5.1)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1E1E1	B1E1EN1
	1¼ (31.8)	240	125	33 (5.1)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1E1E2	B1E1EN2
	1¼ (31.8)	240	250	67 ① (10.4)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1E1E3	B1E1EN4
	3 (76.2)	240	250	27 (4.2)	1	THINBAND–Type A or L	0.5 0.22	Stock	STB1E3A2	B1E3AN2
	3 (76.2)	240	300	33 (5.1)	1	THINBAND–Type A or L	0.5 0.22	Stock	STB1E3A3	B1E3AN3
1½ (34.9)	1 (25.4)	120	140	41 (6.4)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1G1A1	B1G1AN1
	2 (50.8)	240	300	51 ① (7.9)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1G2A1	B1G2AK1
1½ (38.1)	¾ (22.2)	240	100	31 (4.8)	1	Mica Band–Type A or L	0.2 0.09	Stock	B1JORN1	–
	1 (25.4)	120	100	26 (4.0)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1J1A1	B1J1AN1
	1 (25.4)	240	100	26 (4.0)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1J1A2	B1J1AN2
	1 (25.4)	120	150	39 (6.0)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1J1A3	B1J1AN3
	1 (25.4)	240	150	39 (6.0)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1J1A4	B1J1AN4
	1 (25.4)	120	200	52 ① (8.0)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1J1A5	B1J1AN5
	1 (25.4)	240	200	52 ① (8.0)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1J1A6	B1J1AN6
	1¼ (31.8)	240	250	52 ① (8.0)	1	THINBAND–Type A or L	0.2 0.09	Stock	STB1J1E1	B1J1EN1
	1½ (38.1)	240	200	35 (5.4)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1J1J2	B1J1JN2
	1½ (38.1)	120	250	43 (6.6)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1J1J3	B1J1JN3
	1½ (38.1)	240	250	43 (6.6)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1J1J4	B1J1JN4
	1½ (38.1)	120	275	48 ① (7.4)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1J1J5	B1J1JN5
	1½ (38.1)	240	275	48 ① (7.4)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1J1J6	B1J1JN6
	1½ (38.1)	240	300	52 ① (8.0)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1J1J7	B1J1JN7
	1½ (38.1)	240	200	43 (6.7)	1	Mica Band–36 in. Black Glass 90° from Gap	0.3 0.14	Stock	B1J1JX1	–
1½ (38.1)	2 (50.8)	240	300	39 (6.0)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1J2A1	B1J2AN1
	2½ (63.5)	240	400	42 (6.5)	1	THINBAND–Type A or L	0.5 0.23	Stock	STB1J2J1	–
	2½ (63.5)	240	400	43 (6.7)	1	Mica Band–36 in. Type C 90° from Gap	0.5 0.23	Stock	B1J2JC1	–
	3 (76.2)	240	350	30 (4.6)	1	THINBAND–Type A or L	0.6 0.27	Stock	STB1J3A1	B1J3AN1
	3 (76.2)	240	500	43 (6.7)	1	THINBAND–Type A or L	0.6 0.27	Stock	STB1J3A2	B1J3AN2
	3 (76.2)	240	800	69 ① (10.7)	1	THINBAND–Type A or L	0.6 0.27	Stock	STB1J3A3	B1J3AN3
	4 (101.6)	240	600	39 (6.0)	1	THINBAND–Type A or L	0.6 0.27	Stock	STB1J4A1	–
1¼ (44.5)	1½ (38.1)	240	150	22 (3.4)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1N1J1	B1N1JN1
	1½ (38.1)	120	200	29 (4.5)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1N1J2	B1N1JN2
	1½ (38.1)	240	250	36 (5.6)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1N1J6	B1N1JN6

CONTINUED

① Watt density is above Watlow recommendations at some common molding temperatures.

Band Heaters

F.O.B.: St. Louis, Missouri

THINBAND Mica Barrel and Nozzle

Stock Product List (Con't)

I.D. in. (mm)	Width in. (mm)	Volts	Watts	Watt Density W/in ² (W/cm ²)	1 pc. or 2 pc.	Terminals, Leads and Special Features	Approx. Net. Wt. lbs (kg)	Avail.	Code No.	Former Code No.
1½ (44.5)	1½ (38.1)	120	300	43 (6.7)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1N1J7	B1N1JN7
	1½ (38.1)	240	300	43 (6.7)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1N1J8	B1N1JN8
	1½ (38.1)	240	300	44 (6.8)	1	Mica Band–Post Terminals Only w/Strap	0.3 0.14	Stock	B1N1JP5	–
1¾ (47.6)	1 (25.4)	240	140	28 (4.3)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB1R1A1	B1R1AL1
2 (50.8)	1½ (38.1)	120	300	42 (6.5)	1	Mica Band–Post Terminals Only w/Strap	0.3 0.14	Stock	B2A1JP1	–
	1½ (38.1)	240	300	42 (6.5)	1	Mica Band–Post Terminals Only w/Strap	0.3 0.14	Stock	B2A1JP2	–
2½ (54.0)	1 (25.4)	120	200	34 (5.3)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB2C1A1	B2C1AN1
	2 (52.8)	240	200	17 (2.6)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB2C2A1	B2C2AN1
2¾ (57.2)	¾ (22.2)	120	215	43 (6.7)	1	Mica Band–Type A or L	0.3 0.14	Stock	B2E0RN1	–
	1 (25.4)	240	250	45 ^① (7.0)	1	Mica Band–Post Terminals Only w/Strap	0.3 0.14	Stock	B2E1AP2	–
	2 (50.8)	240	525	47 ^① (7.3)	1	Mica Band–Post Terminals Only w/Strap	0.6 0.27	Stock	B2E2AP1	–
	2½ (63.5)	240	500	38 (5.9)	1	Mica Band–36 in. Type K w/sleeving	0.6 0.27	Stock	B2E2JK1	–
2 ⅝ (60.3)	1 (25.4)	240	250	42 (6.5)	1	Mica Band–Post Terminals Only w/Strap	0.3 0.14	Stock	B2G1AP2	–
	1 (25.4)	240	275	46 ^① (7.1)	1	Mica Band–Post Terminals Only w/Strap	0.3 0.14	Stock	B2G1AP3	–
2½ (63.5)	1 (25.4)	240	300	47 ^① (7.3)	1	Mica Band–Post Terminals Only w/Strap	0.3 0.14	Stock	B2J1AP2	–
	1½ (38.1)	240	200	19 (2.9)	1	THINBAND–Type A or L	0.3 0.14	Stock	STB2J1J1	B2J1JN1
	1½ (38.1)	120	300	31 (4.8)	1	THINBAND–All LA Options, except A or L	0.4 0.18	Stock	STB2J1J8	B2J1JP1
	1½ (38.1)	240	300	31 (4.8)	1	THINBAND–All LA Options, except A or L	0.4 0.18	Stock	STB2J1J9	B2J1JP2
	1½ (38.1)	120	350	37 (5.7)	1	THINBAND–All LA Options, except A or L	0.4 0.18	Stock	STB2J1J10	B2J1JP3
	1½ (38.1)	240	350	37 (5.7)	1	THINBAND–All LA Options, except A or L	0.4 0.18	Stock	STB2J1J11	B2J1JP4
	2¾ (60.3)	240	550	39 (6.0)	1	THINBAND–All LA Options, except A or L	0.6 0.27	Stock	STB2J2G1	B2J2GP1 ^②
2½ (63.5)	4 (101.6)	240	850	32 (5.0)	1	THINBAND–All LA Options, except A or L	1.0 0.45	Stock	STB2J4A2	B2J4AP1 ^②
	5 (127.0)	240	1150	35 (5.4)	1	THINBAND–All LA Options, except A or L	1.2 0.54	Stock	STB2J5A3	B2J5AP1 ^②
	8 (203.2)	240	1800	33 (5.1)	1	Mica Band–Post–T/C Hole at Gap	2.0 0.91	Stock	B2J8AP1	–
2¾ (69.9)	1½ (38.1)	240	400	34 (5.3)	1	THINBAND–Type A or L	0.4 0.18	Stock	STB2N1J1	B2N1JN1
3 (76.2)	1 (25.4)	240	200	23 (3.6)	1	THINBAND–Type A or L	0.4 0.18	Stock	STB3A1A2	B3A1AN1
	1 (25.4)	240	250	29 (4.5)	1	THINBAND–Type A or L	0.4 0.18	Stock	STB3A1A3	B3A1AN2
	1 (25.4)	240	300	35 (5.4)	1	THINBAND–Type A or L	0.4 0.18	Stock	STB3A1A4	B3A1AN3
	1 (25.4)	240	300	38 (5.9)	1	Mica Band–Post Terminals Only w/Strap	0.4 0.18	Stock	B3A1AP1	–
	1 (25.4)	240	350	44 (6.8)	1	Mica Band–Post Terminals Only w/Strap	0.4 0.18	Stock	B3A1AP2	–
	1 (25.4)	240	400	50 ^① (7.7)	1	Mica Band–Post Terminals Only w/Strap	0.4 0.18	Stock	B3A1AP4	–
	1½ (38.1)	120	600	47 ^① (7.3)	1	THINBAND–Type A or L	0.5 0.23	Stock	STB3A1J6	B3A1JN2
	1½ (38.1)	240	400	32 (5.0)	1	THINBAND–All LA Options, except A or L	0.5 0.23	Stock	STB3A1J1	B3A1JP1/C1
	1½ (38.1)	240	450	36 (5.6)	1	THINBAND–All LA Options, except A or L	0.5 0.23	Stock	STB3A1J2	B3A1JP2
	1½ (38.1)	120	500	40 (6.2)	1	THINBAND–All LA Options, except A or L	0.5 0.23	Stock	STB3A1J3	B3A1JP3
	1½ (38.1)	240	500	40 (6.2)	1	THINBAND–All LA Options, except A or L	0.5 0.23	Stock	STB3A1J4	B3A1JP4
	2 (50.8)	240	500	30 (4.6)	1	THINBAND–All LA Options, except A or L	0.8 0.36	Stock	STB3A2A1	B3A2AP1
	2 (50.8)	240	600	36 (5.6)	1	THINBAND–All LA Options, except A or L	0.8 0.36	Stock	STB3A2A2	B3A2AP2
	2½ (63.5)	240	650	33 (5.1)	1	THINBAND–All LA Options, except A or L	0.8 0.36	Stock	STB3A2J7	B3A2JP1
	3 (76.2)	240	750	30 (4.7)	1	THINBAND–All LA Options, except A or L	1.0 0.46	Stock	STB3A3A18	–

Band Heaters

CONTINUED

① Watt density is above Watlow recommendations at some common molding temperatures.
 ② Mica Band–Post–thermocouple hole at gap, THINBAND replacement does not include thermocouple hole at gap.

Band Heaters

THINBAND Mica Barrel and Nozzle

Stock Product List (Con't)

I.D. in. (mm)	Width in. (mm)	Volts	Watts	Watt Density W/in ² (W/cm ²)	1 pc. or 2 pc.	Terminals, Leads and Special Features	Approx. Net. Wt. lbs (kg)	Avail.	Code No.	Former Code No.
3¼ (82.6)	1½ (38.1)	240	400	29 (4.5)	1	THINBAND-All LA Options, except A or L	0.5 0.23	Stock	STB3E1J1	B3E1JP1
	2 (50.8)	240	500	27 (4.2)	1	THINBAND-All LA Options, except A or L	0.7 0.33	Stock	STB3E2A41	-
3½ (88.9)	1 (25.4)	120	300	32 (5.0)	1	Mica Band-36 in. Type C	0.5 0.23	Stock	B3J1AC1	-
	1½ (38.1)	120	400	27 (4.2)	1	THINBAND-All LA Options, except A or L	0.5 0.23	Stock	STB3J1J1	B3J1JP1
	1½ (38.1)	240	500	33 (5.1)	1	THINBAND-All LA Options, except A or L	0.5 0.23	Stock	STB3J1J2	B3J1JP3/P2
	2 (50.8)	240	650	33 (5.1)	1	THINBAND-All LA Options, except A or L	0.7 0.32	Stock	STB3J2A1	B3J2AP1
	2½ (63.5)	240	750	30 (4.6)	1	THINBAND-All LA Options, except A or L	0.8 0.36	Stock	STB3J2J1	B3J2JP1
	3 (76.2)	240	750	25 (3.9)	1	THINBAND-All LA Options, except A or L	1.1 0.54	Stock	STB3J3A31	-
3¾ (95.3)	1 (25.4)	240	350	34 (5.3)	1	Mica Band-Post Terminals Only w/Strap	0.5 0.23	Stock	B3N1AP1	-
	1½ (38.1)	240	700	43 ^① (6.7)	1	THINBAND-All LA Options, except A or L	0.6 0.27	Stock	STB3N1J1	B3N1JP1
	2 (50.8)	240	600	28 (4.4)	1	THINBAND-All LA Options, except A or L	0.8 0.38	Stock	STB3N2A17	-
	2½ (63.5)	240	850	33 (5.1)	1	THINBAND-All LA Options, except A or L	1.0 0.45	Stock	STB3N2J1	B3N2JP1
	3 (76.2)	240	900	28 (4.4)	1	THINBAND-All LA Options, except A or L	1.2 0.58	Stock	STB3N3A5	-
4 (101.6)	1 (25.4)	240	625	55 ^① (8.5)	1	Mica Band-Post Terminals Only w/Strap	0.7 0.32	Stock	B4A1AP1	-
	1½ (38.1)	240	550	32 (5.0)	1	THINBAND-All LA Options, except A or L	0.6 0.27	Stock	STB4A1J1	B4A1JP1/2
	1½ (38.1)	240	750	43 (6.5)	1	THINBAND-All LA Options, except A or L	0.6 0.27	Stock	STB4A1J2	B4A1JP4
	1½ (38.1)	240	650	37 (5.7)	1	THINBAND-All LA Options, except A or L	0.6 0.27	Stock	STB4A1J3	B4A1JP3
	2 (50.8)	240	550	24 (3.7)	1	THINBAND-All LA Options, except A or L	0.8 0.36	Stock	STB4A2A1	B4A2AP1
	2 (50.8)	240	800	35 (5.4)	1	THINBAND-All LA Options, except A or L	0.8 0.36	Stock	STB4A2A2	B4A2AP2
	3 (76.2)	240	1000	29 (4.5)	1	THINBAND-All LA Options, except A or L	1.2 0.58	Stock	STB4A3A31	-
	4 (101.6)	240	1000	29 (4.5)	1	THINBAND-All LA Options, except A or L	1.2 0.58	Stock	STB4A3A31	-
4¼ (107.9)	1½ (38.1)	240	550	30 (4.7)	1	THINBAND-All LA Options, except A or L	0.7 0.32	Stock	STB4E1J13	-
	2 (50.8)	240	700	28 (4.4)	1	THINBAND-All LA Options, except A or L	0.8 0.36	Stock	STB4E2A20	-
	3 (76.2)	240	900	24 (3.7)	1	THINBAND-All LA Options, except A or L	1.2 0.58	Stock	STB4E3A9	-
4½ (114.3)	1 (25.4)	240	350	28 (4.3)	1	Mica Band-Post Terminals Only w/Strap	0.6 0.27	Stock	B4J1AP1	-
	1½ (38.1)	240	650	33 (5.1)	1	THINBAND-All LA Options, except A or L	0.7 0.32	Stock	STB4J1J1	B4J1JP2/3
	1½ (38.1)	240	400	20 (3.1)	1	THINBAND-All LA Options, except A or L	0.7 0.32	Stock	STB4J1J2	B4J1JP1
	2 (50.8)	240	500	19 (2.9)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB4J2A1	B4J2AP1
	2½ (63.5)	240	1000	35 (5.4)	1	THINBAND-All LA Options, except A or L	1.0 0.45	Stock	STB4J2J1	B4J2JC1
	3 (76.2)	240	1200	30 (4.7)	1	THINBAND-All LA Options, except A or L	1.2 0.58	Stock	STB4J3A26	-
4¾ (120.7)	1½ (38.1)	240	600	29 (4.5)	1	THINBAND-All LA Options, except A or L	0.7 0.32	Stock	STB4N1J1	-
	1½ (38.1)	480	600	29 (4.5)	1	THINBAND-All LA Options, except A or L	0.7 0.32	Stock	STB4N1J2	-
	1½ (38.1)	240	650	31 (4.8)	1	THINBAND-All LA Options, except A or L	0.7 0.32	Stock	STB4N1J3	B4N1JP2
	2 (50.8)	240	800	29 (4.5)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB4N2A11	-
	2 (50.8)	480	800	29 (4.5)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB4N2A12	-
	3 (76.2)	240	1100	26 (4.1)	1	THINBAND-All LA Options, except A or L	1.4 0.64	Stock	STB4N3A12	-
	3 (76.2)	480	1100	26 (4.1)	1	THINBAND-All LA Options, except A or L	1.4 0.64	Stock	STB4N3A13	-
	4 (120.7)	240	1100	26 (4.1)	1	THINBAND-All LA Options, except A or L	1.4 0.64	Stock	STB4N3A13	-
	4 (120.7)	240	1100	26 (4.1)	1	THINBAND-All LA Options, except A or L	1.4 0.64	Stock	STB4N3A13	-
4 (123.8)	1½ (38.1)	240	900	42 (6.5)	1	THINBAND-All LA Options, except A or L	0.7 0.32	Stock	STB4R1J1	B4R1JP1
	2 (50.8)	240	650	23 (3.6)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB4R2A1	B4R2AP1
	2 (50.8)	240	760	27 (4.2)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB4R2A2	-
	2 (50.8)	480	760	27 (4.2)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB4R2A3	-
	4 (123.8)	240	760	27 (4.2)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB4R2A3	-

CONTINUED

① Watt density is above Watlow recommendations at some common molding temperatures.

② Mica Band-Post-thermocouple hole at gap, THINBAND replacement does not include thermocouple hole at gap.

Band Heaters

THINBAND Mica Barrel and Nozzle

Stock Product List (Con't)

I.D. in. (mm)	Width in. (mm)	Volts	Watts	Watt Density W/in ² (W/cm ²)	1 pc. or 2 pc.	Terminals, Leads and Special Features	Approx. Net. Wt. lbs (kg)	Avail.	Code No.	Former Code No.
5 (127.0)	1½ (38.1)	240	700	32 (5.0)	1	THINBAND-All LA Options, except A or L	0.7 0.32	Stock	STB5A1J1	B5A1JP1/2
	1½ (38.1)	240	900	41 (6.4)	1	THINBAND-All LA Options, except A or L	0.7 0.32	Stock	STB5A1J2	B5A1JP3
	2 (50.8)	240	900	30 (4.65)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB5A2A27	-
	2 (50.8)	480	900	30 (4.65)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB5A2A28	-
	3 (76.2)	240	850	20 (3.1)	1	THINBAND-All LA Options, except A or L	1.4 0.64	Stock	STB5A3A5	B5A3AP1
	3¼ (82.6)	240	1250	26 (4.0)	1	THINBAND-All LA Options, except A or L	1.5 0.68	Stock	STB5A3E1	B5A3ER1
5½ (130.2)	1½ (38.1)	240	900	42 ^① (6.5)	1	THINBAND-All LA Options, except A or L	0.7 0.32	Stock	STB5C1J2	B5C1JP1
5½ (133.4)	1 (25.4)	240	500	33 (5.1)	1	Mica Band-72 in. (Type C-180° from ⅜" Gap)	0.7 0.32	Stock	B5E1AC1	-
	1½ (38.1)	240	600	26 (4.0)	1	THINBAND-All LA Options, except A or L	0.8 0.36	Stock	STB5E1J1	B5E1JP1
	1½ (38.1)	480	600	43 ^① (6.7)	1	THINBAND-All LA Options, except A or L	0.8 0.36	Stock	STB5E1J5	-
	1½ (38.1)	240	1000	43 ^① (6.7)	1	THINBAND-All LA Options, except A or L	0.8 0.36	Stock	STB5E1J2	B5E1JP3
	2 (50.8)	240	1000	33 ^① (5.1)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB5E2A1	B5E2AP1
	3 (76.2)	240	1200	26 (4.08)	1	THINBAND-All LA Options, except A or L	1.4 0.64	Stock	STB5E3A14	-
	3 (76.2)	480	1200	26 (4.08)	1	THINBAND-All LA Options, except A or L	1.4 0.64	Stock	STB5E3A15	-
5½ (139.7)	1½ (38.1)	240	800	33 (5.1)	1	THINBAND-All LA Options, except A or L	0.8 0.36	Stock	STB5J1J1	B5J1JP1/2
	1½ (38.1)	240	900	37 (5.7)	1	THINBAND-All LA Options, except A or L	0.8 0.36	Stock	STB5J1J2	B5J1JP3
	2 (50.8)	240	1000	30 (4.65)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB5J2A23	-
	2 (50.8)	480	1000	30 (4.65)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB5J2A24	-
	3 (76.2)	240	1500	30 (4.65)	1	THINBAND-All LA Options, except A or L	1.6 0.72	Stock	STB5J3A19	-
	3 (76.2)	480	1500	30 (4.65)	1	THINBAND-All LA Options, except A or L	1.6 0.72	Stock	STB5J3A20	-
5½ (146.0)	1½ (38.1)	240	750	29 (4.47)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB5N1J17	-
	2 (50.8)	240	1000	30 (4.65)	1	THINBAND-All LA Options, except A or L	1.0 0.46	Stock	STB5N2A5	-
	3 (76.2)	240	1500	30 (4.65)	1	THINBAND-All LA Options, except A or L	1.8 0.82	Stock	STB5N3A8	-
	3 (76.2)	480	1500	30 (4.65)	1	THINBAND-All LA Options, except A or L	1.8 0.82	Stock	STB5N3A9	-
6 (152.4)	1½ (38.1)	240	600	22 (3.4)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB6A1J1	B6A1JP1
	1½ (38.1)	240	850	32 (5.0)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB6A1J2	B6A1JP2/3
	1½ (38.1)	240	1000	37 (5.7)	1	THINBAND-All LA Options, except A or L	0.9 0.41	Stock	STB6A1J3	B6A1JP4
	2 (50.8)	240	1000	28 (4.31)	1	THINBAND-All LA Options, except A or L	0.8 0.36	Stock	STB6A2A36	-
	2 (50.8)	480	1000	28 (4.31)	1	THINBAND-All LA Options, except A or L	0.8 0.36	Stock	STB6A2A37	-
	2½ (38.1)	240	1450	34 (5.3)	1	THINBAND-All LA Options, except A or L	1.5 0.68	Stock	STB6A2J3	B6A2JP1
	3 (76.2)	240/480	1400	27 (4.2)	2	Mica Band-Post (2 on 1)	1.6 0.73	Stock	B6A3AR1	-
	3 (76.2)	240	1400	26 (4.0)	1	THINBAND-All LA Options, except A or L	1.6 0.73	Stock	STB6A3A1	-
	3 (76.2)	480	1400	26 (4.0)	1	THINBAND-All LA Options, except A or L	1.6 0.73	Stock	STB6A3A2	-
6½ (158.8)	2 (50.8)	240	1000	27 (4.2)	1	THINBAND-All LA Options, except A or L	1.0 0.46	Stock	STB6E2A5	-
	3 (76.2)	240/480	1500	29 (4.5)	2	Mica Band-Post (2 on 1)	1.8 0.82	Stock	B6E3AR1	-
	3 (76.2)	240	1500	27 (4.2)	1	THINBAND-All LA Options, except A or L	1.8 0.82	Stock	STB6E3A1	-
	3 (76.2)	480	1500	27 (4.2)	1	THINBAND-All LA Options, except A or L	1.8 0.82	Stock	STB6E3A2	-
6¾ (160.3)	3 (76.2)	240	1250	22 (3.4)	1	THINBAND-All LA Options, except A or L	1.8 0.82	Stock	STB6F3A1	-
	3 (76.2)	480	1250	22 (3.4)	1	THINBAND-All LA Options, except A or L	1.8 0.82	Stock	STB6F3A2	-

Band Heaters

CONTINUED

① Watt density is above Watlow recommendations at some common molding temperatures.

Band Heaters

THINBAND Mica Barrel and Nozzle

Stock Product List (Con't)

I.D. in. (mm)	Width in. (mm)	Volts	Watts	Watt Density W/in ² (W/cm ²)	1 pc. or 2 pc.	Terminals, Leads and Special Features	Approx. Net. Wt. lbs (kg)	Avail.	Code No.	Former Code No.
6½ (165.1)	1½ (38.1)	240	900	31 (4.8)	1	THINBAND–All LA Options, except A or L	0.9 0.41	Stock	STB6J1J1	B6J1JP1/2
	1½ (38.1)	240	950	33 (5.1)	1	THINBAND–All LA Options, except A or L	0.9 0.41	Stock	STB6J1J2	B6J1JP3
	2 (50.8)	240	1000	26 (3.9)	1	THINBAND–All LA Options, except A or L	1.2 0.54	Stock	STB6J2A1	B6J2AP1
	3 (76.2)	240	1400	24 (3.7)	1	THINBAND–All LA Options, except A or L	1.8 0.82	Stock	STB6J3A13	–
	3 (76.2)	480	1400	24 (3.7)	1	THINBAND–All LA Options, except A or L	1.8 0.82	Stock	STB6J3A14	–
6% (168.3)	4½ (114.3)	240	2300	26 (4.0)	1	THINBAND–All LA Options, except A or L	2.8 1.27	Stock	STB6L4J1	B6L4JR1
6¾ (171.5)	1½ (38.1)	240	1000	33 (5.1)	1	THINBAND–All LA Options, except A or L	1.0 0.45	Stock	STB6N1J1	B6N1JP2
	1½ (38.1)	240	750	25 (3.9)	1	THINBAND–All LA Options, except A or L	1.0 0.45	Stock	STB6N1J2	B6N1JP1
	1½ (38.1)	240	1150	38 (5.9)	1	THINBAND–All LA Options, except A or L	1.0 0.45	Stock	STB6N1J3	B6N1JP3
	2 (50.8)	240	1300	32 (5.0)	1	THINBAND–All LA Options, except A or L	1.3 0.59	Stock	STB6N2A1	B6N2AP1/2
	3 (76.2)	240	2000	33 (5.1)	1	THINBAND–All LA Options, except A or L	2.0 0.90	Stock	STB6N3A7	–
	3 (76.2)	480	2000	33 (5.1)	1	THINBAND–All LA Options, except A or L	2.0 0.90	Stock	STB6N3A8	–
7 (177.8)	1½ (38.1)	240	950	30 (4.6)	1	THINBAND–All LA Options, except A or L	1.0 0.45	Stock	STB7A1J1	B7A1JP1
	1½ (38.1)	240	1100	35 (5.4)	1	THINBAND–All LA Options, except A or L	1.0 0.45	Stock	STB7A1J2	B7A1JP2
	2 (50.8)	240	1100	26 (4.1)	1	THINBAND–All LA Options, except A or L	1.3 0.59	Stock	STB7A2A16	–
	2 (50.8)	480	1100	26 (4.1)	1	THINBAND–All LA Options, except A or L	1.3 0.59	Stock	STB7A2A17	–
	3 (76.2)	230/460	1650	28 (4.3)	2	Mica Band–Post (2 on 1)	2.0 0.91	Stock	B7A3AR1	–
	3 (76.2)	230	1650	26 (4.0)	1	THINBAND–All LA Options, except A or L	2.0 0.91	Stock	STB7A3A1	–
	3 (76.2)	460	1650	26 (4.0)	1	THINBAND–All LA Options, except A or L	2.0 0.91	Stock	STB7A3A2	–
7¼ (184.1)	1½ (38.1)	240	1000	30 (4.7)	1	THINBAND–All LA Options, except A or L	1.1 0.50	Stock	STB7E1J9	–
	2 (50.8)	240	1200	27 (4.2)	1	THINBAND–All LA Options, except A or L	1.5 0.65	Stock	STB7E2A10	–
	2 (50.8)	480	1200	27 (4.2)	1	THINBAND–All LA Options, except A or L	1.5 0.65	Stock	STB7E2A11	–
	3 (76.2)	240	1800	27 (4.2)	1	THINBAND–All LA Options, except A or L	2.2 1.00	Stock	STB7E3A3	–
	3 (76.2)	480	1800	27 (4.2)	1	THINBAND–All LA Options, except A or L	2.2 1.00	Stock	STB7E3A4	–
	7½ (190.5)	1½ (38.1)	240	1000	30 (4.6)	1	THINBAND–All LA Options, except A or L	1.1 0.50	Stock	STB7J1J1
1½ (38.1)		240	1200	35 (5.4)	1	THINBAND–All LA Options, except A or L	1.1 0.50	Stock	STB7J1J2	B7J1JP2
2 (50.8)		240	1200	27 (4.2)	1	THINBAND–All LA Options, except A or L	2.0 0.90	Stock	STB7J2A13	–
2 (50.8)		480	1200	27 (4.2)	1	THINBAND–All LA Options, except A or L	2.0 0.90	Stock	STB7J2A14	–
3 (76.2)		240	1800	27 (4.2)	1	THINBAND–All LA Options, except A or L	2.4 1.08	Stock	STB7J3A1	–
3 (76.2)		480	1800	27 (4.2)	1	THINBAND–All LA Options, except A or L	2.4 1.08	Stock	STB7J3A2	–
7¾ (196.8)		1½ (38.1)	240	1000	29 (4.5)	1	THINBAND–All LA Options, except A or L	1.2 0.58	Stock	STB7N1J10
	1½ (38.1)	480	1000	29 (4.5)	1	THINBAND–All LA Options, except A or L	1.2 0.58	Stock	STB7N1J11	–
	2 (50.8)	240	1300	28 (4.4)	1	THINBAND–All LA Options, except A or L	2.1 0.95	Stock	STB7N2A2	–
	2 (50.8)	480	1300	28 (4.4)	1	THINBAND–All LA Options, except A or L	2.1 0.95	Stock	STB7N2A3	–
	3 (76.2)	240	2000	29 (4.5)	1	THINBAND–All LA Options, except A or L	2.3 1.10	Stock	STB7N3A22	–
	3 (76.2)	480	2000	29 (4.5)	1	THINBAND–All LA Options, except A or L	2.3 1.10	Stock	STB7N3A23	–
8 (203.2)	1½ (38.1)	240	950	26 (4.0)	1	THINBAND–All LA Options, except A or L	1.1 0.50	Stock	STB8A1J1	B8A1JP1
	1½ (38.1)	240	1200	33 (5.1)	1	THINBAND–All LA Options, except A or L	1.1 0.50	Stock	STB8A1J2	B8A1JP2
	1½ (38.1)	480	1200	33 (5.1)	1	THINBAND–All LA Options, except A or L	1.1 0.50	Stock	STB8A1J3	–
	1½ (38.1)	240	1400	39 ^① (6.0)	1	THINBAND–All LA Options, except A or L	1.1 0.50	Stock	STB8A1J4	B8A1JP4

CONTINUED

① Watt density is above Watlow recommendations at some common molding temperatures.

Band Heaters

THINBAND Mica Barrel and Nozzle

Stock Product List (Con't)

I.D. in. (mm)	Width in. (mm)	Volts	Watts	Watt Density W/in ² (W/cm ²)	1 pc. or 2 pc.	Terminals, Leads and Special Features	Approx. Net. Wt. lbs (kg)	Avail.	Code No.	Former Code No.
8 (203.2)	2 (50.8)	240	1500	30 (4.7)	1	THINBAND-All LA Options, except A or L	1.5 0.65	Stock	STB8A2A20	-
	2 (50.8)	480	1500	30 (4.7)	1	THINBAND-All LA Options, except A or L	1.5 0.65	Stock	STB8A2A21	-
	3 (76.2)	240/480	2250	33 (5.1)	2	Mica Band-Post (2 on 1)	2.6 1.18	Stock	B8A3AR1	-
	3 (76.2)	240	2250	31 (4.8)	1	THINBAND-All LA Options, except A or L	2.6 1.18	Stock	STB8A3A1	-
	3 (76.2)	480	2250	31 (4.8)	1	THINBAND-All LA Options, except A or L	2.6 1.18	Stock	STB8A3A2	-
8½ (209.6)	2 (50.8)	240	1500	30 (4.7)	1	THINBAND-All LA Options, except A or L	2.3 1.10	Stock	STB8E2A8	-
	2 (50.8)	480	1500	30 (4.7)	1	THINBAND-All LA Options, except A or L	2.3 1.10	Stock	STB8E2A9	-
	3 (76.2)	240	2000	27 (4.2)	1	THINBAND-All LA Options, except A or L	2.6 1.25	Stock	STB8E3A10	-
	3 (76.2)	480	2000	27 (4.2)	1	THINBAND-All LA Options, except A or L	2.6 1.25	Stock	STB8E3A11	-
	4 (101.6)	240/480	3000	31 (4.8)	2	Mica Band-Post Terminals Only w/Strap	3.0 1.36	Stock	B8E4AP1	-
	4 (101.6)	240	3000	30 (4.6)	1	THINBAND-All LA Options, except A or L	3.0 1.36	Stock	STB8E4A1	-
	4 (101.6)	480	3000	30 (4.6)	1	THINBAND-All LA Options, except A or L	3.0 1.36	Stock	STB8E4A2	-
8¾ (215.9)	1½ (38.1)	240	1200	31 (4.8)	1	THINBAND-All LA Options, except A or L	1.2 0.55	Stock	STB8J1J1	B8J1JP1
	1½ (38.1)	480	1200	30 (4.7)	1	THINBAND-All LA Options, except A or L	1.2 0.55	Stock	STB8J1J21	-
	2 (50.8)	240	1600	31 (4.8)	1	THINBAND-All LA Options, except A or L	1.6 0.73	Stock	STB8J2A1	B8J2AP1
	2 (50.8)	480	1600	30 (4.7)	1	THINBAND-All LA Options, except A or L	1.6 0.73	Stock	STB8J2A12	-
	3 (76.2)	240	2500	32 (5.0)	1	THINBAND-Post Terminals Only	2.4 1.10	Stock	STB8J3A14	-
8¾ (215.9)	3 (76.2)	480	2500	32 (5.0)	1	THINBAND-All LA Options, except A or L	2.4 1.10	Stock	STB8J3A15	-
8 (222.3)	1½ (38.1)	240	1200	30 (4.7)	1	THINBAND-All LA Options, except A or L	1.3 0.61	Stock	STB8N1J10	-
	1½ (38.1)	480	1200	30 (4.7)	1	THINBAND-All LA Options, except A or L	1.3 0.61	Stock	STB8N1J11	-
	2 (50.8)	240	1600	30 (4.7)	1	THINBAND-All LA Options, except A or L	1.5 0.68	Stock	STB8N2A10	-
	2 (50.8)	480	1600	30 (4.7)	1	THINBAND-All LA Options, except A or L	1.5 0.68	Stock	STB8N2A11	-
	3 (76.2)	240/480	2000	27 (4.2)	2	Mica Band-Post (2 on 1)	2.7 1.22	Stock	B8N3AR1	-
	3 (76.2)	240	2000	25 (3.9)	1	THINBAND-All LA Options, except A or L	2.7 1.22	Stock	STB8N3A1	-
	3 (76.2)	480	2000	25 (3.9)	1	THINBAND-All LA Options, except A or L	2.7 1.22	Stock	STB8N3A2	-
9 (228.6)	1½ (38.1)	240	1300	32 (5.0)	1	THINBAND-All LA Options, except A or L	1.3 0.59	Stock	STB9A1J1	B9A1JP1
	1½ (38.1)	240	1500	37 ^① (5.7)	1	THINBAND-All LA Options, except A or L	1.3 0.59	Stock	STB9A1J2	B9A1JP2
	1½ (38.1)	480	1500	37 ^① (5.7)	1	THINBAND-All LA Options, except A or L	1.3 0.59	Stock	STB9A1J3	-
	2 (50.8)	240	1800	33 (5.1)	1	THINBAND-All LA Options, except A or L	1.5 0.68	Stock	STB9A2A1	B9A2AP1
	2 (50.8)	480	1800	33 (5.1)	1	THINBAND-All LA Options, except A or L	1.5 0.68	Stock	STB9A2A20	-
	3 (76.2)	240	2500	30 (4.7)	1	THINBAND-Post Terminals Only	2.6 1.18	Stock	STB9A3A18	-
	3 (76.2)	480	2500	30 (4.7)	1	THINBAND-All LA Options, except A or L	2.6 1.18	Stock	STB9A3A19	-
9¾ (244.3)	2 (50.8)	240	1800	32 (5.0)	1	THINBAND-All LA Options, except A or L	1.7 0.77	Stock	STB9J2A1	B9J2AP1
	3 (76.2)	240	2000	23 (3.6)	1	THINBAND-All LA Options, except A or L	2.8 1.27	Stock	STB9J3A1	-
	3 (76.2)	480	2000	23 (3.6)	1	THINBAND-All LA Options, except A or L	2.8 1.27	Stock	STB9J3A2	-
9¾ (244.5)	3 (76.2)	240/480	3000	37	2	Mica Band-Post Terminals Only w/Strap	2.7 1.22	Stock	B9L3AP2	-
	3 (76.2)	480	3000	34 (5.3)	1	THINBAND-All LA Options, except A or L	2.8 1.27	Stock	STB9L3A4	-
9¾ (247.7)	2 (50.8)	240	2000	34 (5.3)	1	THINBAND-All LA Options, except A or L	1.9 0.86	Stock	STB9N2A1	B9N2AP1
10 (254.0)	1½ (38.1)	240	1400	31 (4.8)	1	THINBAND-All LA Options, except A or L	1.5 0.68	Stock	STB10A1J1	B10A1JP1
10¼ (260.4)	4 (101.6)	240/480	3000	25 (3.9)	2	Mica Band-Post Terminals Only w/Strap	3.9 1.77	Stock	B10E4AP1	-
11 (279.4)	1½ (38.1)	240	1600	32 (5.0)	1	THINBAND-All LA Options, except A or L	1.7 0.77	Stock	STB11A1J1	B11A1JP1
	2 (50.8)	240	2000	30 (4.6)	1	THINBAND-All LA Options, except A or L	2.1 0.95	Stock	STB11A2A1	B11A2AP1
12 (304.8)	2 (50.8)	240/480	2300	33 (5.1)	2	Mica Band-Post Terminals Only w/Strap	2.3 1.04	Stock	B12A2AP2	-

① Watt density is above Watlow recommendations at some common molding temperatures.

Band Heaters

THINBAND Mica Barrel and Nozzle

How to Order

To order stock THINBAND or standard mica band, specify:

- Watlow code number
- Termination type(s)
- Lead lengths
- Quantity

Notes:

- Post terminals are provided unless otherwise specified.
- On Types A, L and K, 12 inches (305 mm) in lead length will be supplied unless otherwise specified.
- On Types E, C, F and H, 14 inches (356 mm) in lead length will be supplied unless otherwise specified.

- On Types A, E, C, F and H, leads will be two inches (51 mm) longer than the protective covering unless otherwise specified.
- All LA termination options will be 180 degrees from the gap unless otherwise specified.
- Stock LA termination options can only be supplied with LA termination 180 degrees from the gap.
- For THINBAND heaters higher than 8.5 amps, consult Watlow.

Availability

- **Stock:** Same day shipment
- **Made-to-Order:** If our stock units do not meet your application needs, Watlow can manufacture to your special requirements. Please consult your sales engineer or authorized distributor for price and delivery of made-to-order items.