

# VIEW ALL PRODUCTS

## View All Products

Showing all 33 results



### Hole Cleaning Tool

Model Specs

Warranty: [Product Warranty](#)



### Transducer Simulator Tester

Model Specs

Model: TST-MV/V

Warranty: [Product Warranty](#)



### Hole Machining Tool Kit

Model Specs

Model: MHK-AA

Warranty: [Product Warranty](#)





### Hole Cleaning Tool Kit

#### Model Specs

|           |                                  |
|-----------|----------------------------------|
| Model:    | HCT                              |
| Warranty: | <a href="#">Product Warranty</a> |



### Torque Wrench

#### Model Specs

|           |                                  |
|-----------|----------------------------------|
| Model:    | GP730/A4R                        |
| Warranty: | <a href="#">Product Warranty</a> |



### GPR 700/770 Series

#### Model Specs

|           |                                  |
|-----------|----------------------------------|
| Model:    | GPR700, GPR770                   |
| Warranty: | <a href="#">Product Warranty</a> |



### Rupture Disks

#### Model Specs

|        |                    |
|--------|--------------------|
| Model: | RDEB               |
| Range: | Burst Rating 1,500 |



### Melt Pressure Gauges

#### Model Specs

|        |                     |
|--------|---------------------|
| Model: | A30, A31            |
| Range: | 0-5,000 or 0-10,000 |



### T1 Series

#### Model Specs

|        |          |
|--------|----------|
| Model: | T1C, T1S |
| Range: | N/A      |

|                  |                                  |
|------------------|----------------------------------|
|                  | to 15,000 PSI                    |
| <b>Warranty:</b> | <a href="#">Product Warranty</a> |

LEARN MORE

|                  |                                  |
|------------------|----------------------------------|
|                  | PSI                              |
| <b>Warranty:</b> | <a href="#">Product Warranty</a> |

LEARN MORE

|                  |                                  |
|------------------|----------------------------------|
| <b>Warranty:</b> | <a href="#">Product Warranty</a> |
|------------------|----------------------------------|

LEARN MORE



### Space Restricted High Pressure Transducer/Transmitter

| Model Specs      |  |
|------------------|--|
| <b>Model:</b>    | 131-IB, 231-IB, 331-IB   |
| <b>Range:</b>    | 0-500 to 0-30,000 PSI  |
| <b>Accuracy:</b> | ± 1.0% FSO, 500 psi through 3000 psi, ± 0.25% FSO, 5000 psi through 30,000 psi |
| <b>Warranty:</b> | <a href="#">Product Warranty</a>   |



### Hydraulic IMH Series

| Model Specs      |                                  |
|------------------|----------------------------------|
| <b>Model:</b>    | C-IMH, M-IMH, V-IMH              |
| <b>Range:</b>    | 0-100 to 0-15,000 PSI            |
| <b>Warranty:</b> | <a href="#">Product Warranty</a> |



### E-Series 1% Accuracy

| Model Specs      |   |
|------------------|---|
| <b>Model:</b>    | 190, 191, 195, 290, 291, 295, 390, 391, 395 |
| <b>Range:</b>    | 0-3,000 to 0-10,000 PSI                     |
| <b>Accuracy:</b> | ±1.0% Standard FSO                          |
| <b>Warranty:</b> | <a href="#">Product Warranty</a>            |



### Non-Intrusive Zero And Span

| Model Specs |  |
|-------------|--|
| Model:      | 331X-QE, 331P-QE   |
| Range:      | 0-500 to 0-30,000 PSI  |
| Accuracy:   | ± 0.25% FSO, RSS (0-5000 psi & higher), ± 0.5% FSO, RSS (0-500 and 0-3500 psi) |
| Warranty:   | <a href="#">Product Warranty</a>   |



### Flange Mounted High Pressure Transducer/Transmitter Can Be Used In Hazardous Environments

| Model Specs    |  |
|----------------|--|
| Model:         | 130-IE, 131-IE, 230-IE, 231-IE, 330-IE, 331-IE, 230X-IE, 231X-IE, 330X-IE, 331X-IE, 230P-IE, 231P-IE, 330P-IE, 331P-IE, 330Z-IE, 331Z-IE |
| Range:         | 0-500 to 0-30,000 PSI  |
| Certification: | X = FM Explosion Proof, P = FM & CSA Explosion Proof, Z = FM & CSA Intrinsically Safe  |
| Warranty:      | <a href="#">Product Warranty</a>   |



### Space Restricted High Pressure Transducer/Transmitter

| Model Specs |   |
|-------------|---|
| Model:      | 131-IB, 231-IB, 331-IB  |
| Range:      | 0-500 to 0-30,000 PSI   |
| Accuracy:   | ± 1.0% FSO, 500 psi through 3000 psi , ± 0.25% FSO, 5000 psi through 30,000 psi |
| Warranty:   | <a href="#">Product Warranty</a>  |



### Smart Series Flange Mounted Low Pressure Transmitter For Hazardous Environments

| Model Specs    |  |
|----------------|--|
| Model:         | 430X-FX, 430X-FY, 431X-FX, 431X-FY   |
| Range:         | 0-25 to 0-1,000 PSI  |
| Accuracy:      | 0.5% FSO standard, 0.25% FSO available, 0.15% FSO available on Models 430X, 431X |
| Certification: | X = FM Explosion Proof, P = FM & CSA Explosion Proof                             |
| Warranty:      | <a href="#">Product Warranty</a>   |



### Smart Series Flange Mounted Low Pressure Transmitter & Temperature Probe

| Model Specs |   |
|-------------|---|
| Model:      | 435-FX, 435-FY  |
| Range:      | 0-25 to 0-1,000 PSI   |
| Accuracy:   | 0.5% FSO standard, 0.25% FSO available, 0.15% FSO available on Models 435 |
| Warranty:   | <a href="#">Product Warranty</a>  |



### Smart Series Flange Mounted Low Pressure Transmitter

| Model Specs |                                  |
|-------------|----------------------------------|
| Model:      | 430-FX, 430-FY, 431-FX, 431-FY   |
| Range:      | 0-25 to 0-1,000 PSI              |
| Accuracy:   | 0.15% FSO                        |
| Warranty:   | <a href="#">Product Warranty</a> |



### Flange Mounted Low Pressure Transmitter For Hazardous Environments

| Model Specs           |  |
|-----------------------|--|
| <b>Model:</b>         | 230X-FX, 231X-FX, 230P-FX, 231P-FX, 330X-FX, 331X-FX, 330P-FX, 331P-FX, 230X-FY, 231X-FY, 230P-FY, 231P-FY, 330X-FY, 331X-FY, 330P-FY, 331P-FY |
| <b>Range:</b>         | 0-25 to 0-1,000 PSI  |
| <b>Accuracy:</b>      | 0.5% FSO standard, 0.25% FSO available, 0.15% FSO available on Models 430X, 431X   |
| <b>Certification:</b> | X = FM Explosion Proof, P = FM & CSA Explosion Proof   |
| <b>Warranty:</b>      | <a href="#">Product Warranty</a>   |



### Flange Mounted Low Pressure Transmitter & Temperature Probe

| Model Specs      |  |
|------------------|--|
| <b>Model:</b>    | 335-FX, 335-FY   |
| <b>Range:</b>    | 0-25 to 0-1,000 PSI  |
| <b>Accuracy:</b> | 0.5% FSO standard, 0.25% FSO available, 0.15% FSO available on Models 435% |
| <b>Warranty:</b> | <a href="#">Product Warranty</a>   |



### Flange Mounted Low Pressure Transducer/Transmitter

| Model Specs      |  |
|------------------|--|
| <b>Model:</b>    | 130-FX, 131-FX, 230-FX, 231-FX, 330-FX, 331-FX, 130-FY, 131-FY, 230-FY, 231-FY, 330-FY, 331-FY |
| <b>Range:</b>    | 0-25 to 0-1,000 PSI  |
| <b>Accuracy:</b> | 0.5% FSO   |
| <b>Warranty:</b> | <a href="#">Product Warranty</a>   |







### Low Pressure Transducer/Transmitter

| Model Specs |  |
|-------------|--|
| Model:      | 130-IA, 230-IA, 330-IA, 131-IA, 231-IA, 331-IA |
| Range:      | 0-25 to 0-1,000 PSI                            |
| Accuracy:   | 0.5% FSO                                       |
| Warranty:   | <a href="#">Product Warranty</a>               |



### Smart Series Flange Mounted Low Pressure Transmitter For Hazardous Environments

| Model Specs    |  |
|----------------|--|
| Model:         | 430X-FX, 430X-FY, 431X-FX, 431X-FY                   |
| Range:         | 0-25 to 0-1,000 PSI                                  |
| Accuracy:      | 0.15% FSO  |
| Certification: | X = FM Explosion Proof, P = FM & CSA Explosion Proof |
| Warranty:      | <a href="#">Product Warranty</a>                     |



### Smart Series Flange Mounted Low Pressure Transmitter

| Model Specs |                                  |
|-------------|----------------------------------|
| Model:      | 430-FX, 430-FY, 431-FX, 431-FY   |
| Range:      | 0-25 to 0-1,000 PSI              |
| Accuracy:   | 0.15% FSO                        |
| Warranty:   | <a href="#">Product Warranty</a> |





### Smart Rangeable Melt Pressure Transmitter For Hazardous Environments

| Model Specs    |  |
|----------------|--|
| Model:         | 430X, 431X, 430P, 431P   |
| Range:         | 0-500 to 0-30,000 PSI  |
| Accuracy:      | ± 0.15% FSO, RSS (0-5000 psi and higher), ± 0.2% FSO, RSS (0-3500 psi and lower) |
| Certification: | X = FM Explosion Proof, P = FM & CSA Explosion Proof                             |
| Warranty:      | <a href="#">Product Warranty</a>   |



### Smart Rangeable Melt Pressure Transmitter

| Model Specs |  |
|-------------|--|
| Model:      | 430, 431   |
| Range:      | 0-500 to 0-30,000 PSI  |
| Accuracy:   | ± 0.15% FSO, RSS (0-5000 psi and higher), ± 0.2% FSO, RSS (0-3500 psi and lower) |
| Warranty:   | <a href="#">Product Warranty</a>   |



### Pressure Transmitter With HART Communications

| Model Specs |                                  |
|-------------|----------------------------------|
| Model:      | 330-Q0, 331-Q0, 335-Q0           |
| Range:      | 0-500 to 0-30,000 PSI            |
| Accuracy:   | ± 0.25% FSO                      |
| Warranty:   | <a href="#">Product Warranty</a> |



BUY ONLINE



BUY ONLINE



## Hazardous Environments Plastic Melt Pressure Transducer / Transmitter

| Model Specs    |   |
|----------------|---|
| Model:         | 130X, 131X, 230X, 231X, 330X, 331X, 130P, 131P, 230P, 231P, 330P, 331P, 330Z, 331Z    |
| Range:         | 0-500 to 0-30,000 PSI   |
| Accuracy:      | ±0.25% FSO, RSS (0-5000 psi & higher), ±0.5% FSO, RSS (0-500 and 0-3500 psi)          |
| Certification: | X = FM Explosion Proof, P = FM & CSA Explosion Proof, Z = FM & CSA Intrinsically Safe |
| Warranty:      | <a href="#">Product Warranty</a>  |

## Standard Accuracy Pressure And Temperature Sensor

| Model Specs           |                                  |
|-----------------------|----------------------------------|
| Model:                | V164, V264, V364                 |
| Range:                | 0-500 to 0-30,000 PSI            |
| Accuracy:             | ±0.50% Standard FSO              |
| Rigid Stem:           | 6"                               |
| Thermocouple:         | J-Type                           |
| Process Connection:   | 1/2"-20 UNF 2A                   |
| Electrical Connector: | 6-Pin                            |
| Diaphragm:            | Alpha Coated SS                  |
| Fill:                 | Mercury                          |
| Warranty:             | <a href="#">Product Warranty</a> |

## Standard Accuracy Transmitter

| Model Specs           |                                  |
|-----------------------|----------------------------------|
| Model:                | V163, V263, V363                 |
| Range:                | 0-500 to 0-30,000 PSI            |
| Accuracy:             | ±0.50% Standard FSO              |
| Rigid Stem:           | 6"                               |
| Thermocouple:         | none                             |
| Process Connection:   | 1/2"-20 UNF 2A                   |
| Electrical Connector: | 6-Pin                            |
| Diaphragm:            | Alpha Coated SS                  |
| Fill:                 | Mercury                          |
| Warranty:             | <a href="#">Product Warranty</a> |

BUY  
ONLINE



## Standard Accuracy Transducer

| Model Specs           |                                  |
|-----------------------|----------------------------------|
| Model:                | V162, V262, V362                 |
| Range:                | 0-500 to 0-30,000 PSI            |
| Accuracy:             | ±0.50% Standard FSO              |
| Rigid Stem:           | 6"                               |
| Thermocouple:         | None                             |
| Process Connection:   | 1/2"-20 UNF 2A                   |
| Electrical Connector: | 6-Pin                            |
| Diaphragm:            | Alpha Coated SS                  |
| Fill:                 | Mercury                          |
| Warranty:             | <a href="#">Product Warranty</a> |


## Premium Accuracy Pressure And Temperature Sensor

| Model Specs |                                  |
|-------------|----------------------------------|
| Model:      | V135, V235, V335                 |
| Range:      | 0-500 to 0-30,000 PSI            |
| Accuracy:   | ±0.25% Premium FSO               |
| Warranty:   | <a href="#">Product Warranty</a> |

## Premium Accuracy Transducer/Transmitter

| Model Specs |                                    |
|-------------|------------------------------------|
| Model:      | V130, V230, V330, V131, V231, V331 |
| Range:      | 0-500 to 0-30,000 PSI              |
| Accuracy:   | ±0.25% Premium FSO                 |
| Warranty:   | <a href="#">Product Warranty</a>   |

1-800-437-4328

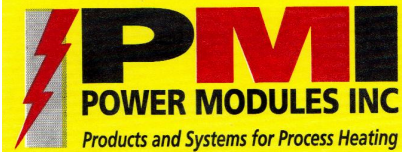

WWW.PMIHEAT.COM